


artos[®]

F9 73NSV0

TECHNICAL SPECIFICATIONS

thermostatic valve with 3-way
non-shared diverter

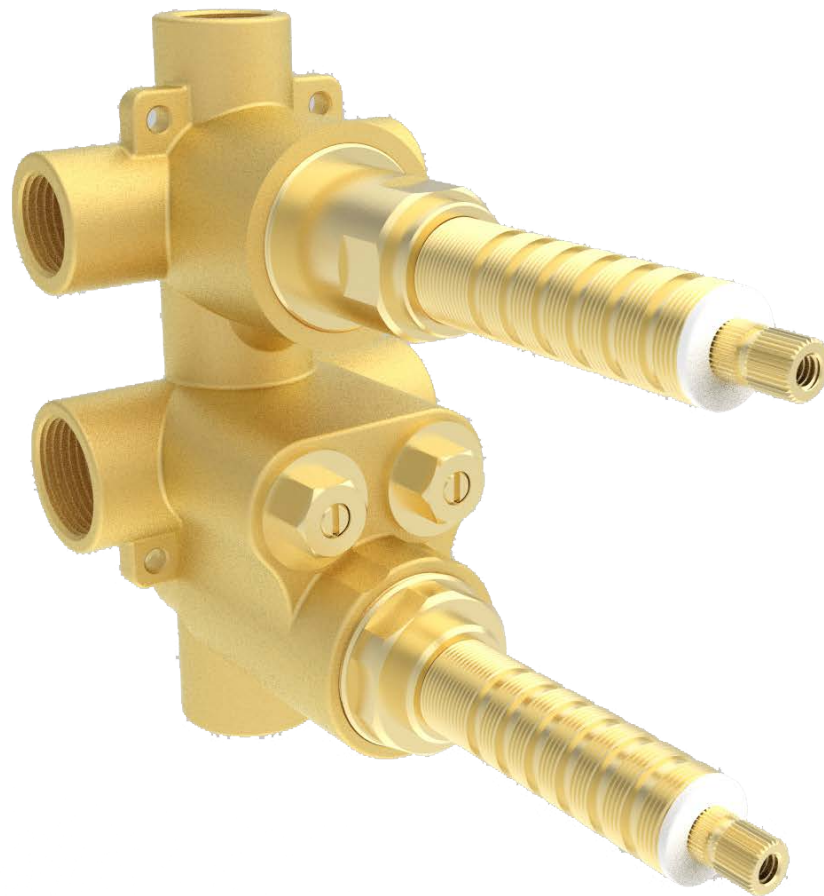


artos[®]

F973NSV0

OPERATING SPECIFICATIONS

thermostatic valve with 3-way
non-shared diverter

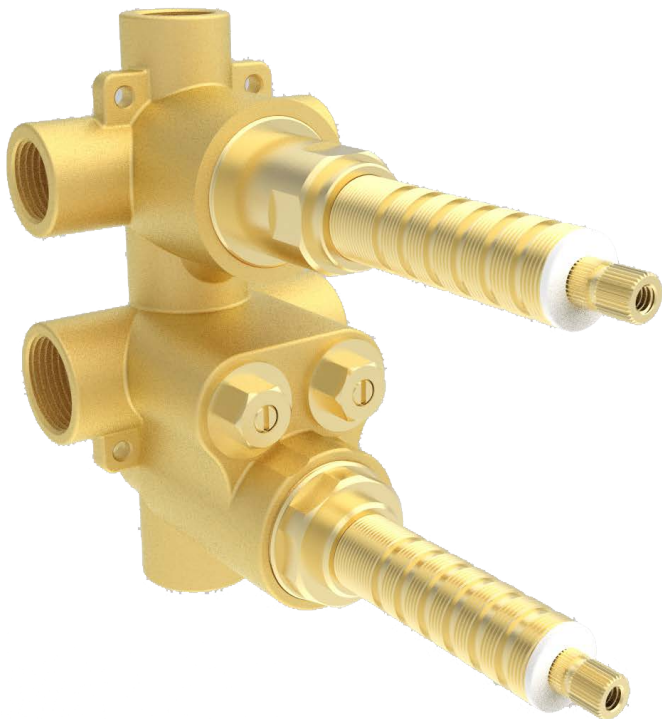

MIXED WATER TEMPERATURE

Maximum: 120°F

HOT WATER SUPPLY TEMPERATURE

Maximum: 180°F

Minimum: 50°F

Advisable: 150°F- 160°F

Minimum difference between hot mixed temperature 50°F

OPERATING PRESSURE

Maximum: 125psi

Minimum: 20psi

Recommended: 30psi- 95psi

Operating pressures (on hot and cold lines) should be kept as balanced as possible, in order to assure the maximum efficiency.

STANDARDS

ASSE 1016.ASME A112.18.1/CSA B123.1

APPROVALS



artos[®]

F973NSV0

TECHNICAL SPECIFICATIONS

thermostatic valve with 3-way
non-shared diverter

