

artos[®]

F703-6

INSTALLATION GUIDE

flexible hose shower kit with
integrated water outlet squ

BRUSHED NICKEL(BN)



CHROME(CH)



artos[®]

F703-6

OPERATING SPECIFICATIONS

flexible hose shower kit with
integrated water outlet squ



FEATURES

Integrated Water Outlet
60" Flexible Hose

OPERATING PRESSURE

Minimum: 15 psi
Maximum: 75 psi
Above 90psi it may be necessary to install a pressure reducer

OPERATING TEMPATURE

Maximum: 176°

FLOW CAPACITY

2.0 USGPM

INLET/OUTLET

1/2" Female NPT

REQUIREMENTS


This unit requires a control

artos[®]


F703-6

PRODUCT DIMENSIONS


flexible hose shower kit with
integrated water outlet squ

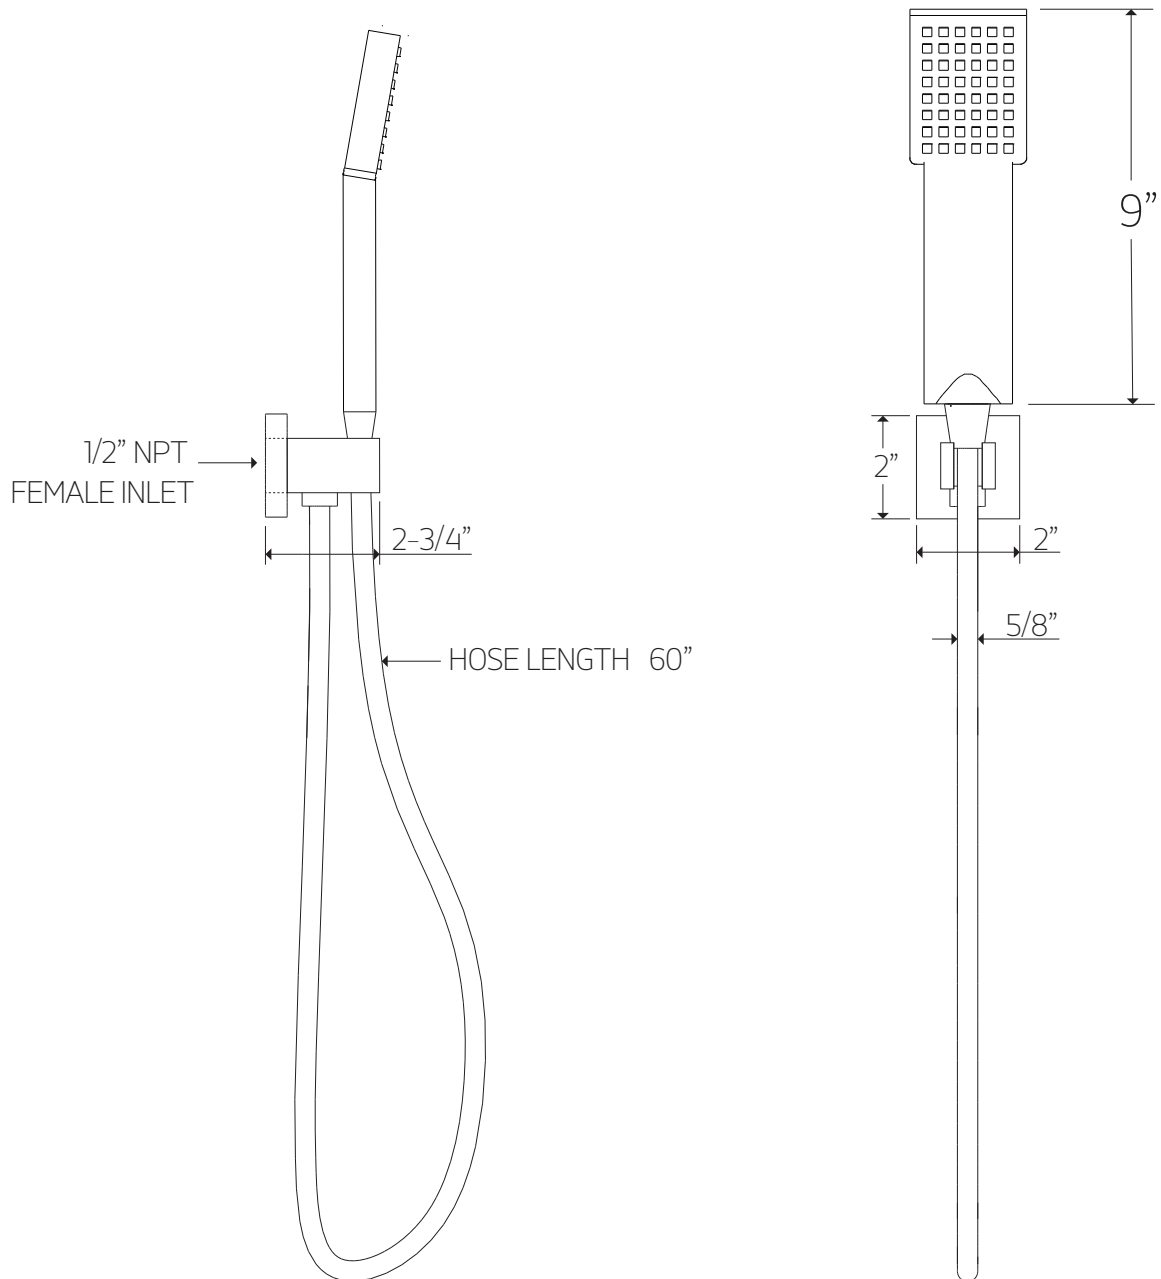

STEP 1

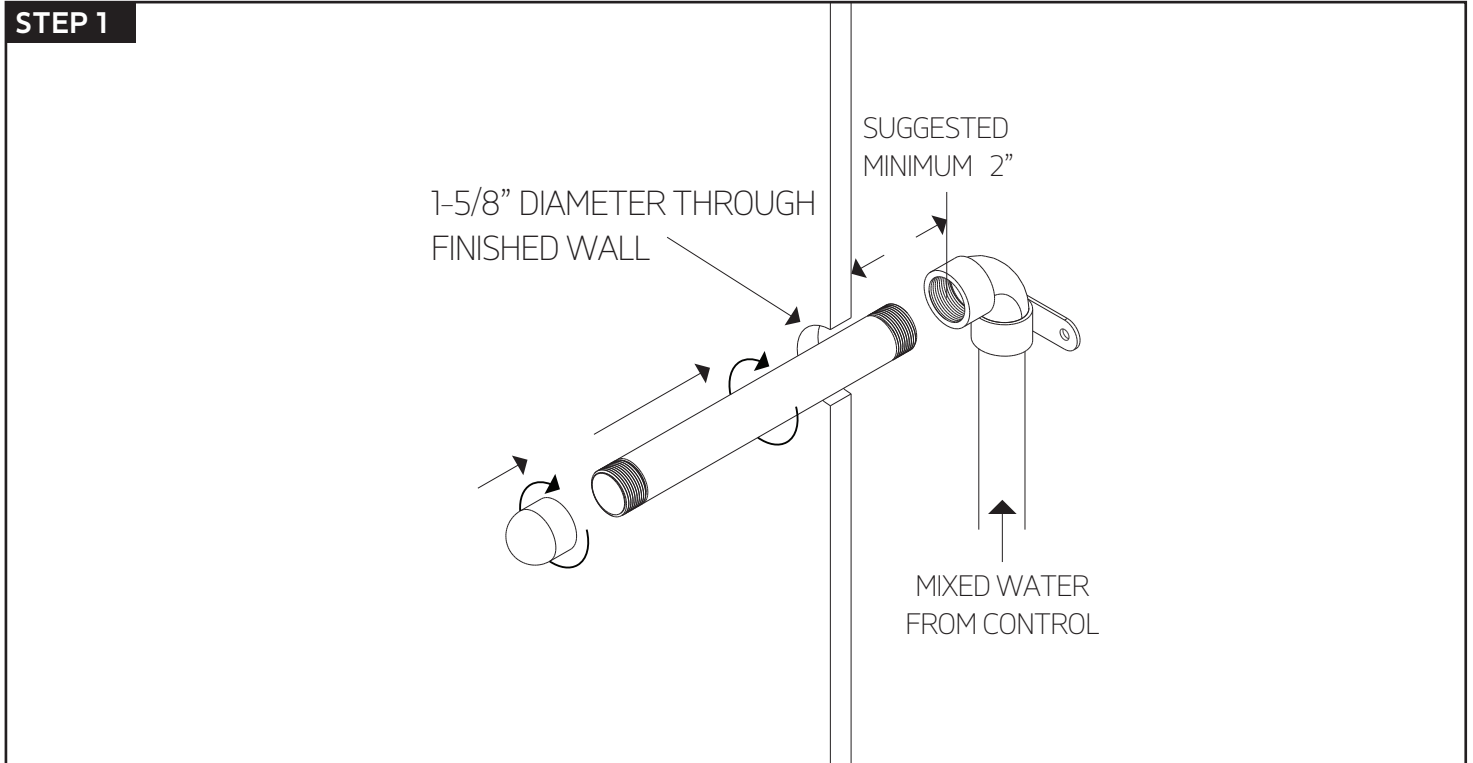


STEP 2

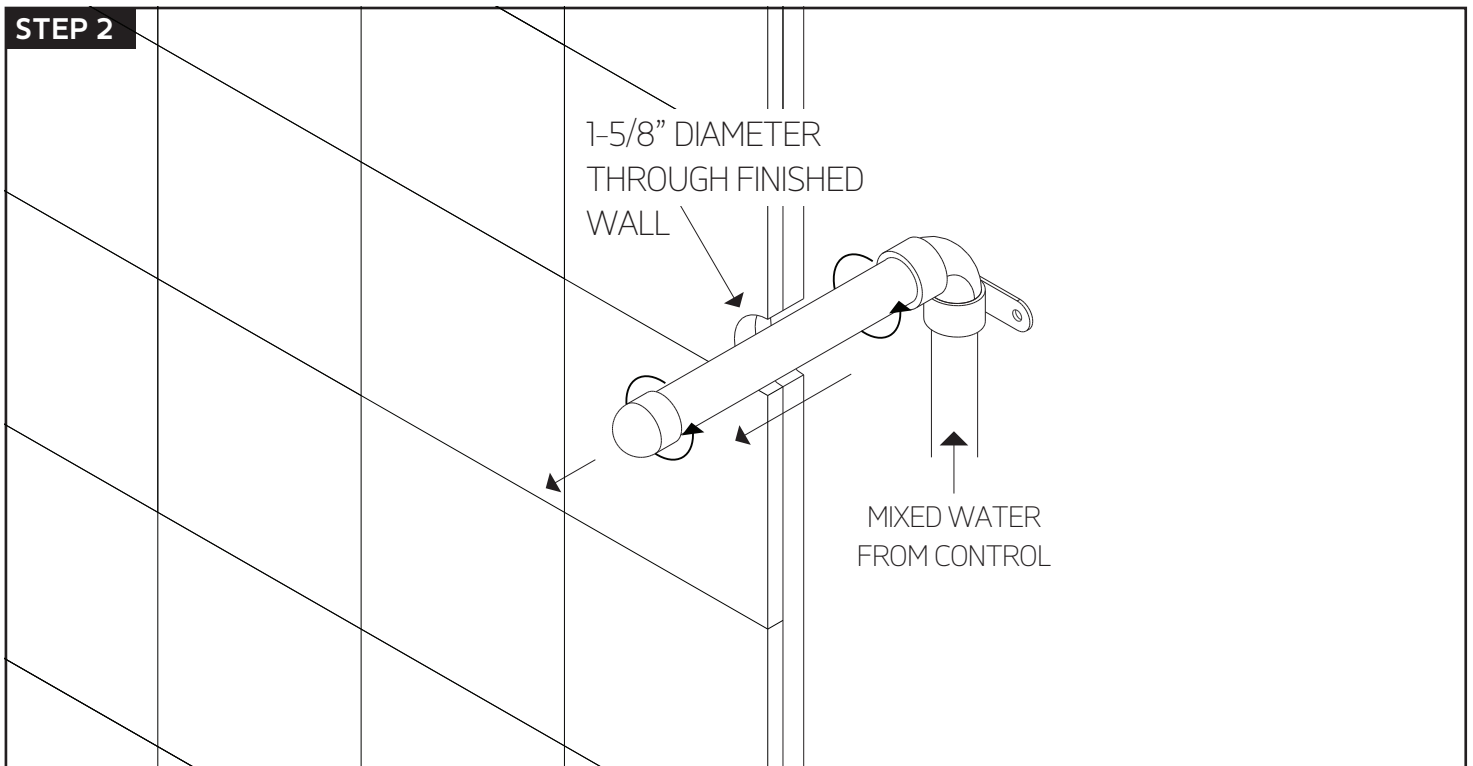


INSTALLATION STEPS

STEP 3

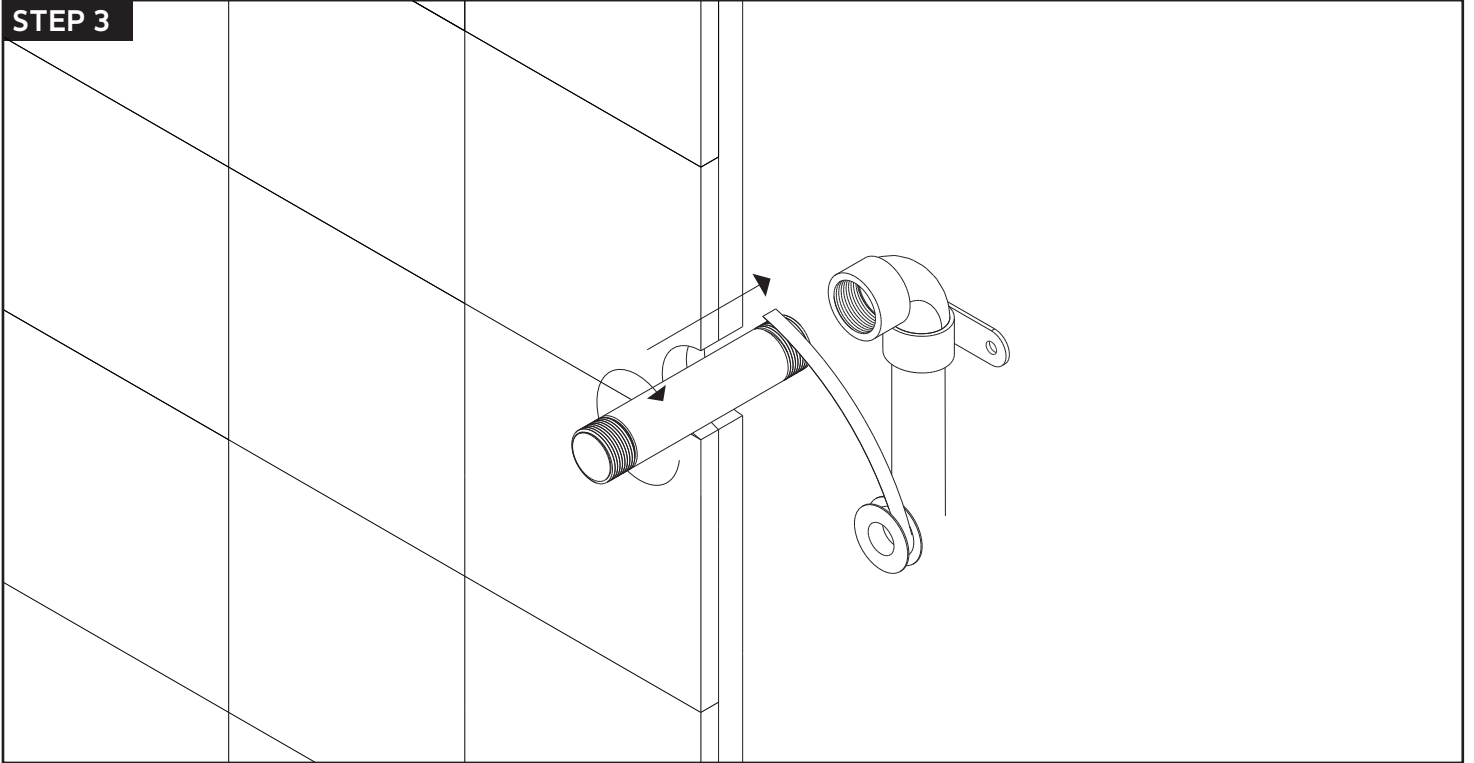

STEP 4

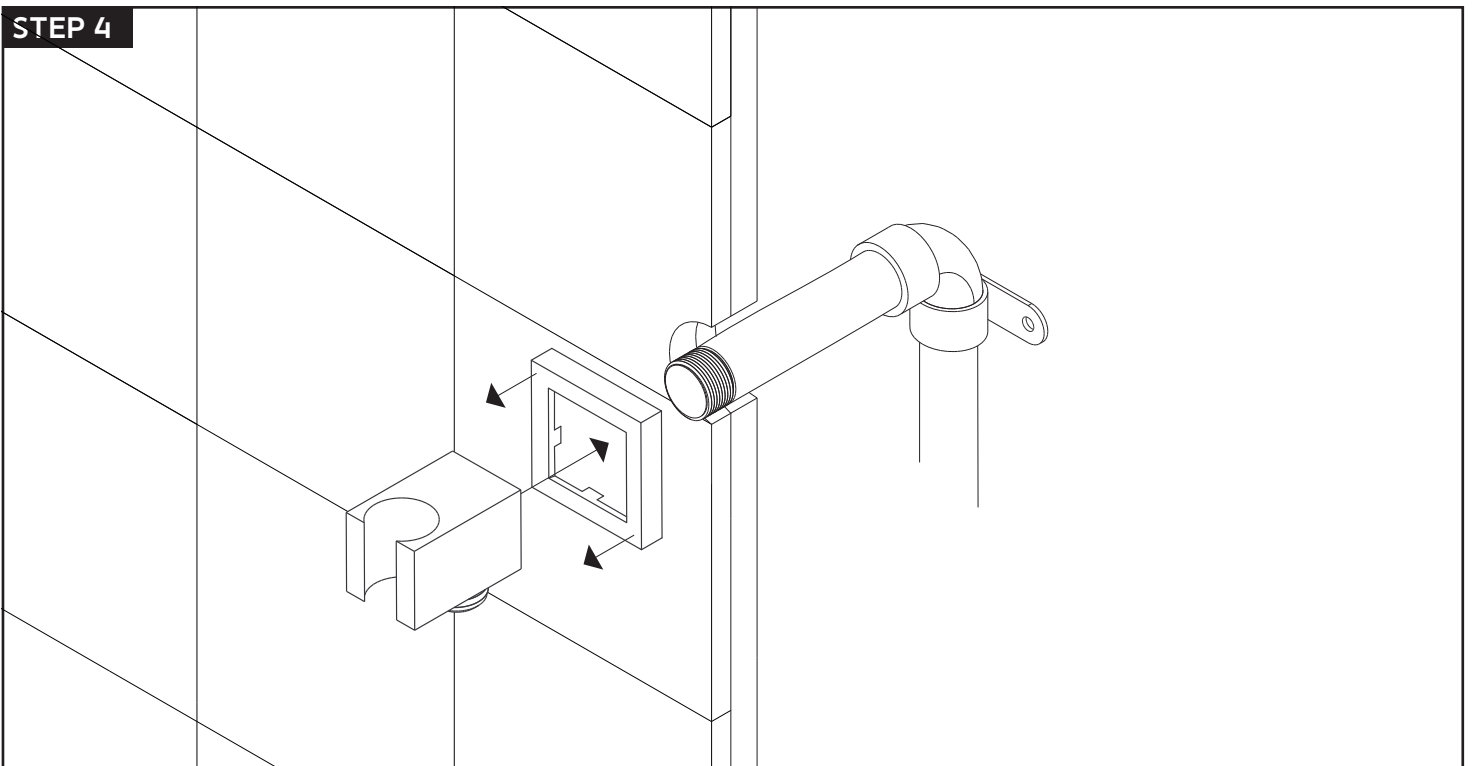


artos[®]

F703-6


INSTALLATION STEPS

flexible hose shower kit with
integrated water outlet squ

STEP 5

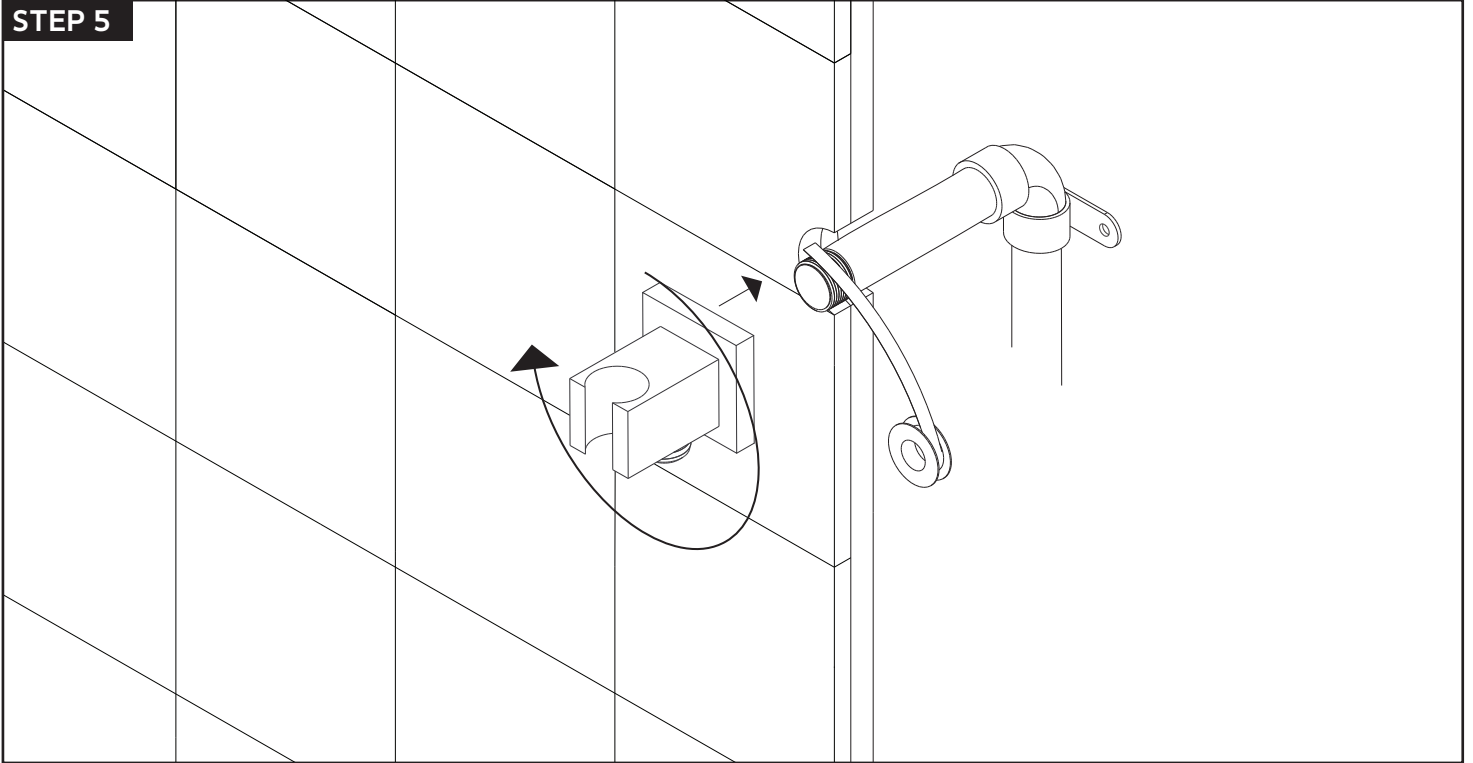

STEP 5

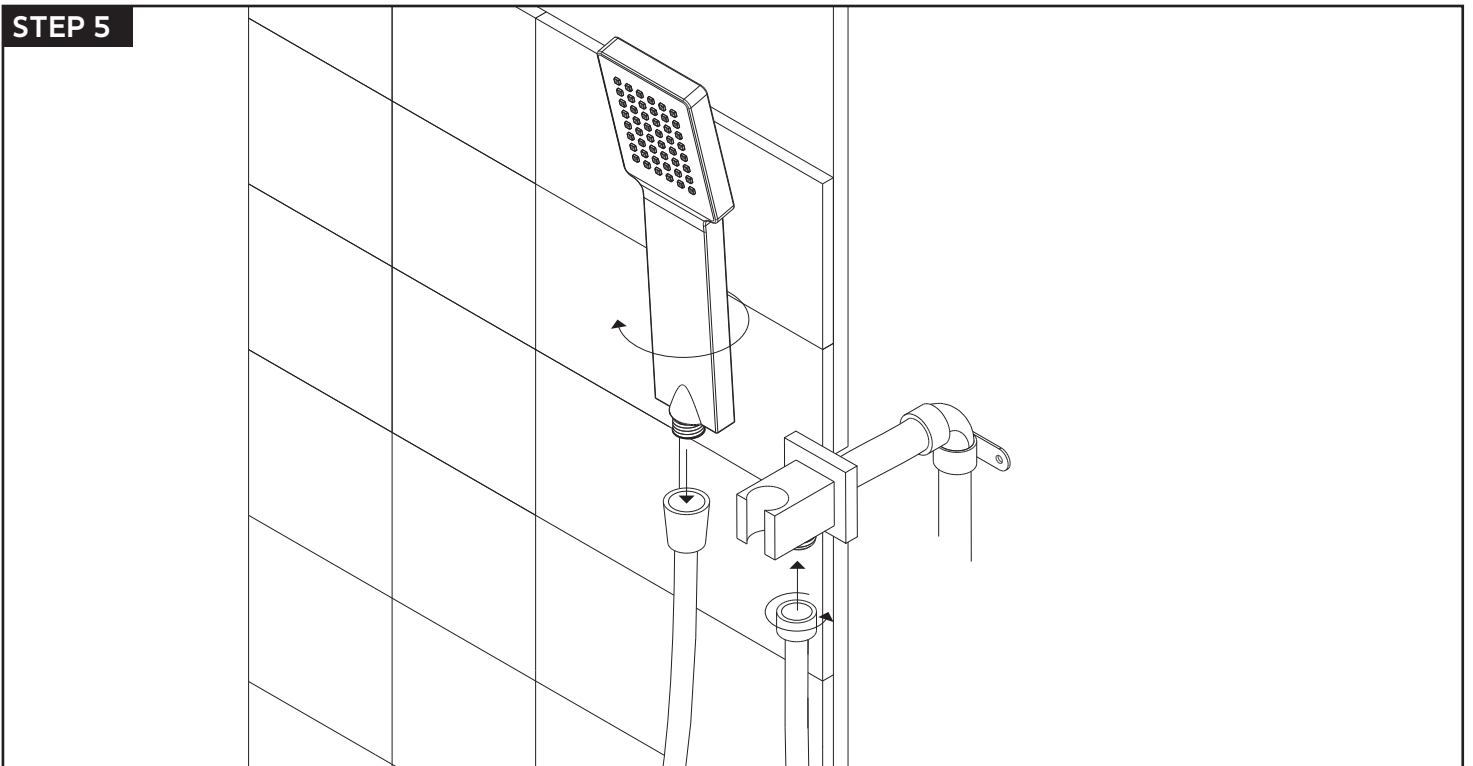


artos[®]

F703-6

PARTS BREAKDOWN

flexible hose shower kit with
integrated water outlet squ

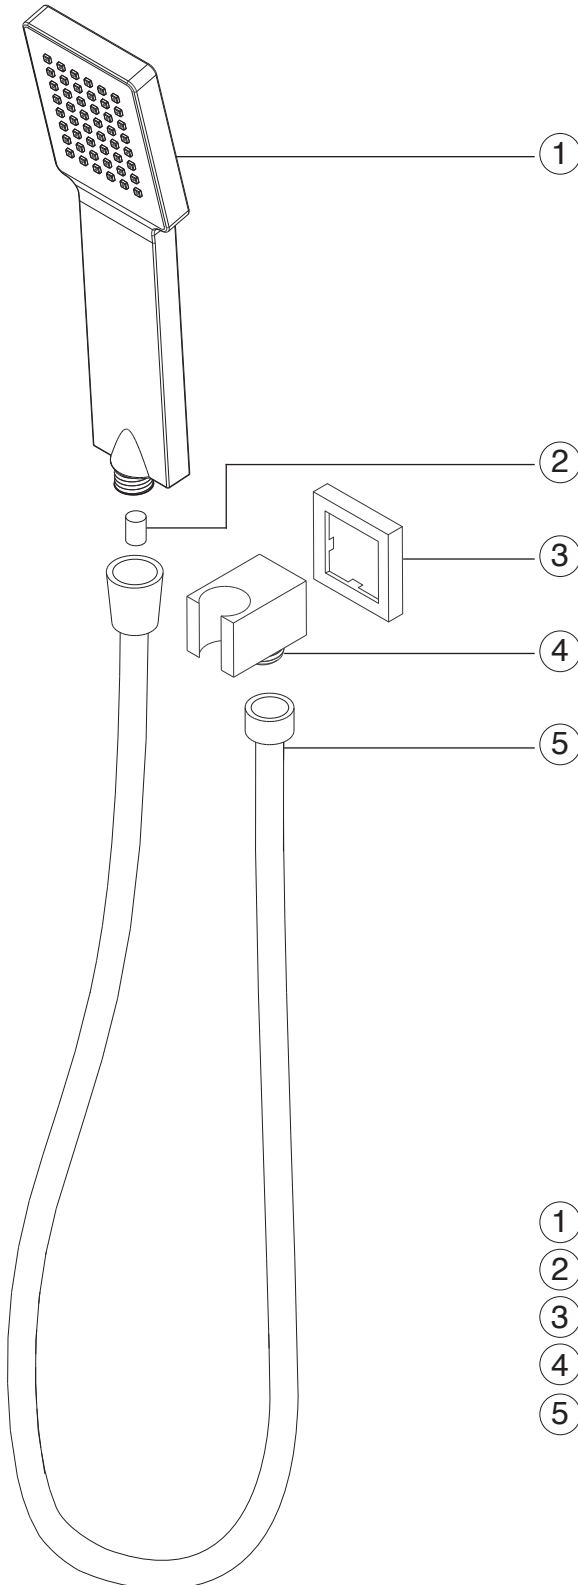

- ① **HAND SHOWER** F703-6 XP1
- ② **HAND SHOWER CHECK VALVE** F703-6 XP2
- ③ **ESCUTCHEON PLATE** F703-6 XP3
- ④ **SHOWER OUTLET ELBOW AND HOLDER** F703-6 XP4
- ⑤ **SHOWER HOSE** F703-6 XP5

artos®

F703-6

CARE & MAINTENANCE

flexible hose shower kit with integrated water outlet squ

For best results, keep the following in mind to retain the high quality finish of your artos® shower kit:

- Use a soft, dampened sponge or cloth. On no account should you use an abrasive material such as a brush, scouring pad or steel wool to clean surfaces.
- Test your cleaning agent solution on an inconspicuous area before applying to the entire product.
- Wipe surfaces clean and rinse completely with water immediately after applying cleaning agent.
- An ideal cleaning technique is to rinse faucet thoroughly and blot dry any water from the surface after each use.

LIMITED LIFETIME WARRANTY

UWR/LPLWHG/LIHWLPH:DUUDW

UWRIDXFHWKDEHHPDXIDFWXUHGXGHUWKHKLKHWTXDOLWDGPDXIDFWXULWDGDUGUWR
IDXFHWDUHXDUDWHHGIRUOLIHDDLWOHDNDGPDXIDFWXULGHIHFWIRUDORDWKHRULLDO
FRXPUSXUFKDHURLW7KLDUUDWDSSOLHWRLWDOODWLRWLK86DDGDDG0HLFR
TRUWKPHULFDRPPHUFLO,GXWULDORUEXLHXHUUUDWHGIRUDSHULRGRIRHHUIURP
WXHRULLDOGDWHRISXUFKDH

7KLDUUDWLRWUDIHUDEOHDGSSOLHHFOXLHOWRWKHRULLDORHURUHGXHU ,IDGHIHFWL
IRXGGXULRUPDOXHUWRLOODWLWHOFWLRUHSDLUUHSODFHRUPDNHDDSSURSULDWHDGMXWPHW
DPDFDXHGEDFFLGHWPLXHDEXHLPURSULWDOODWLRRUUDOWHWDWLRLOORLWGHKDUUDW
7KLDUUDWGRHRWFRHUUHSODFHPHWSDUWKHUHGDPDHLFDXHGGERUPDOHDUDGWHDU
/DERUFKDUHLWDOODWLRURRWKHULFLGHWDORUFRHTXHWLDOFRWLOORWEHFRHUHG

5HSODFHPHWSDUWWKDWTXDOLIIRUDUUDWUHSDLUFDEHREWDLHGFEFRWDFWLUWRDW
5726RUEHPDLODWLIRDURXFRP3URRIRISXUFKDHULLDODOHUHFHLSWIUR PWKH

Item No: **F 703-6**
Serial No: