

# artos<sup>®</sup>

F905-2

INSTALLATION GUIDE

body jet rnd

BRUSHED NICKEL(BN)



CHROME(CH)



# artos<sup>®</sup>

F905-2

body jet rnd

## OPERATING SPECIFICATIONS



### FEATURES

Easy Clean Nozzles  
70 Degree Rotation

### OPERATING PRESSURE

Minimum: 15 psi  
Maximum: 75 psi  
Above 90psi it may be necessary to  
install a pressure reducer

### OPERATING TEMPERATURE

Maximum: 176°

### FLOW RATE

1.0 USGPM


### INLET/OUTLET

1/2" Female

### REQUIREMENTS

This unit requires a control




body jet rnd

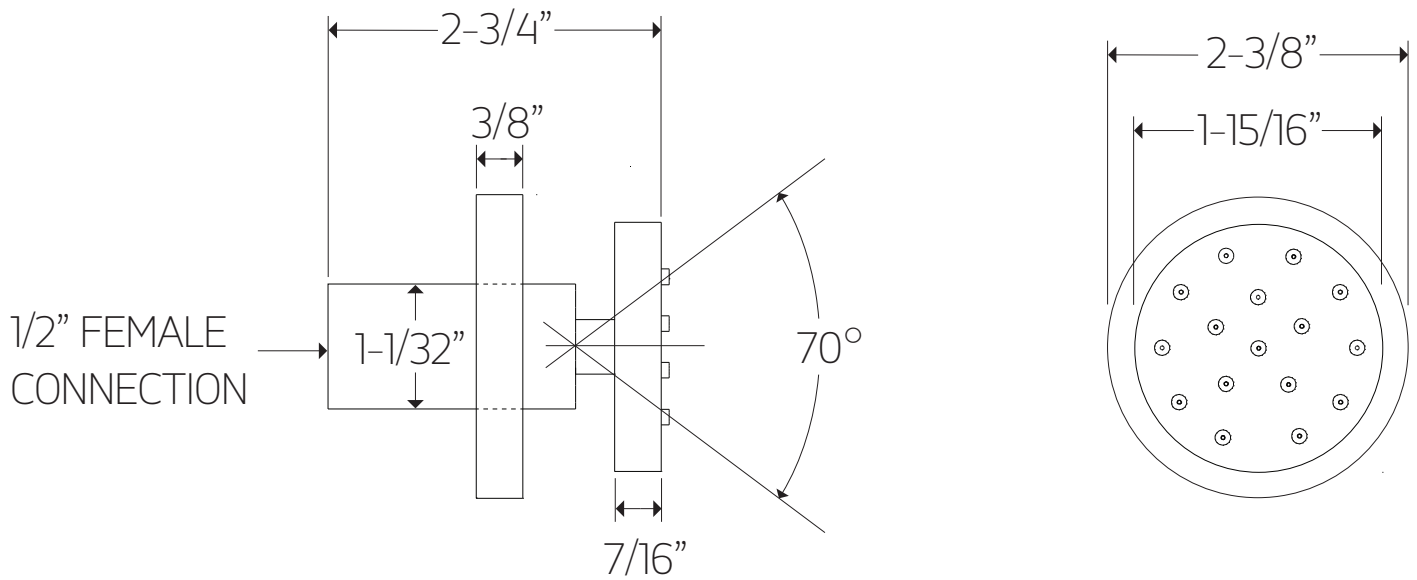

# artos<sup>®</sup>


F905-2

body jet rnd

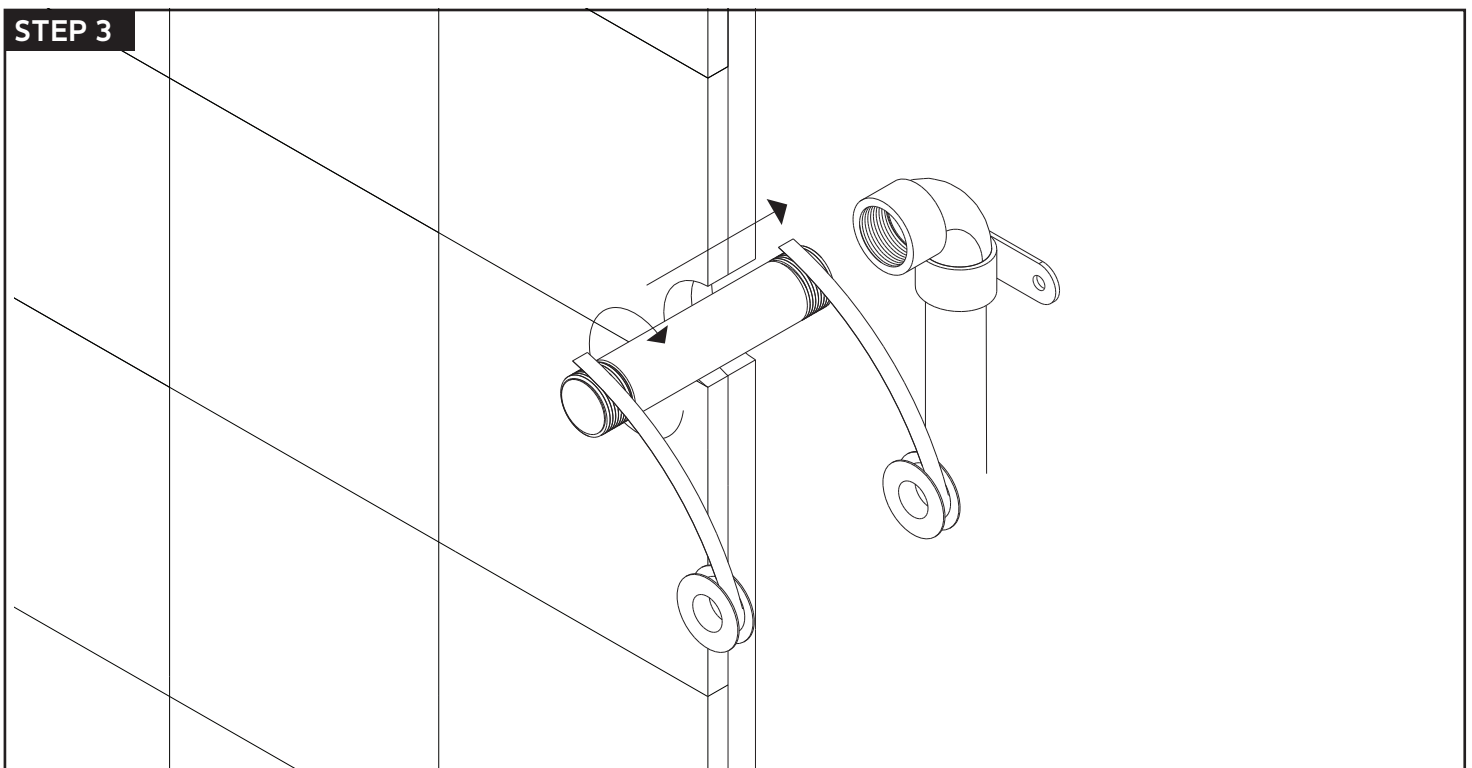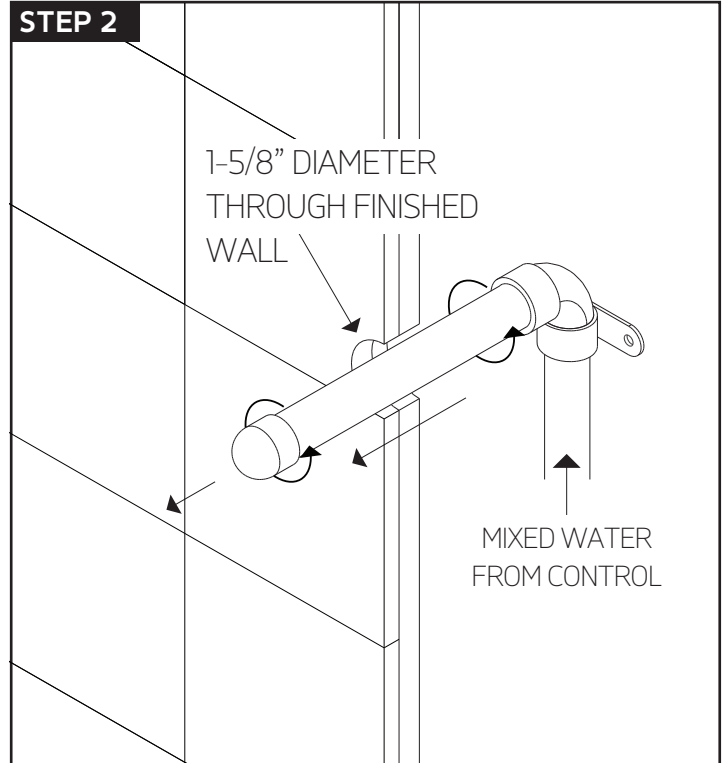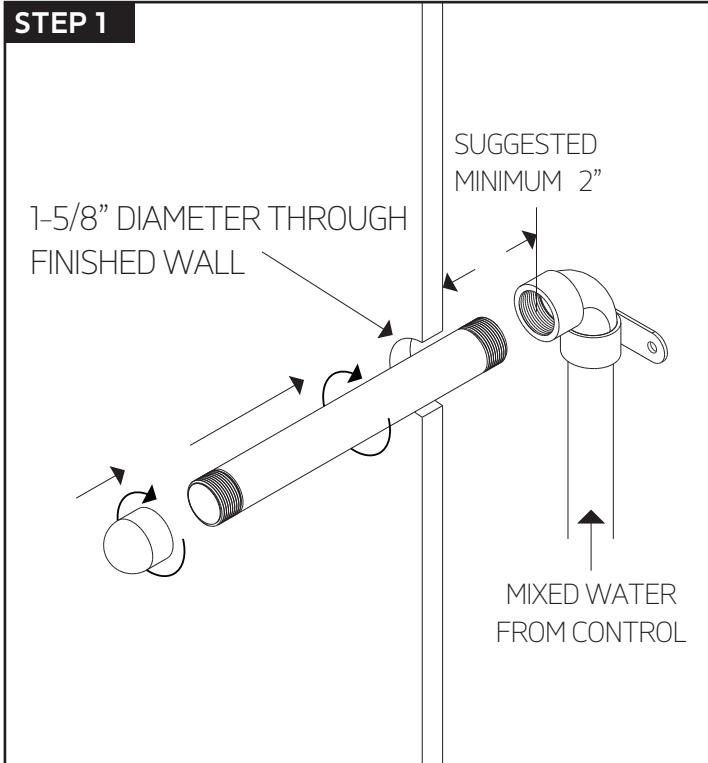


# INSTALLATION STEPS


## STEP 4

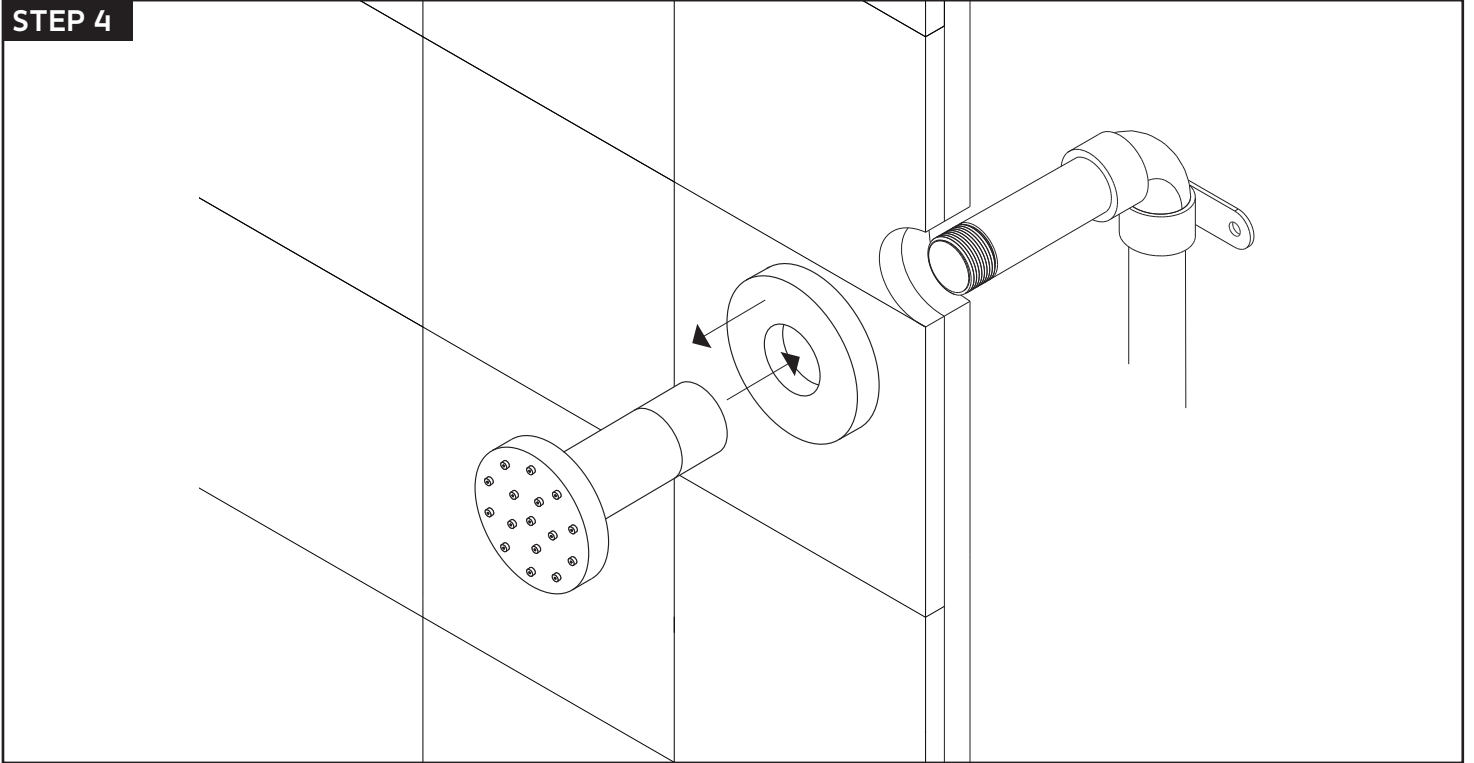

## STEP 5

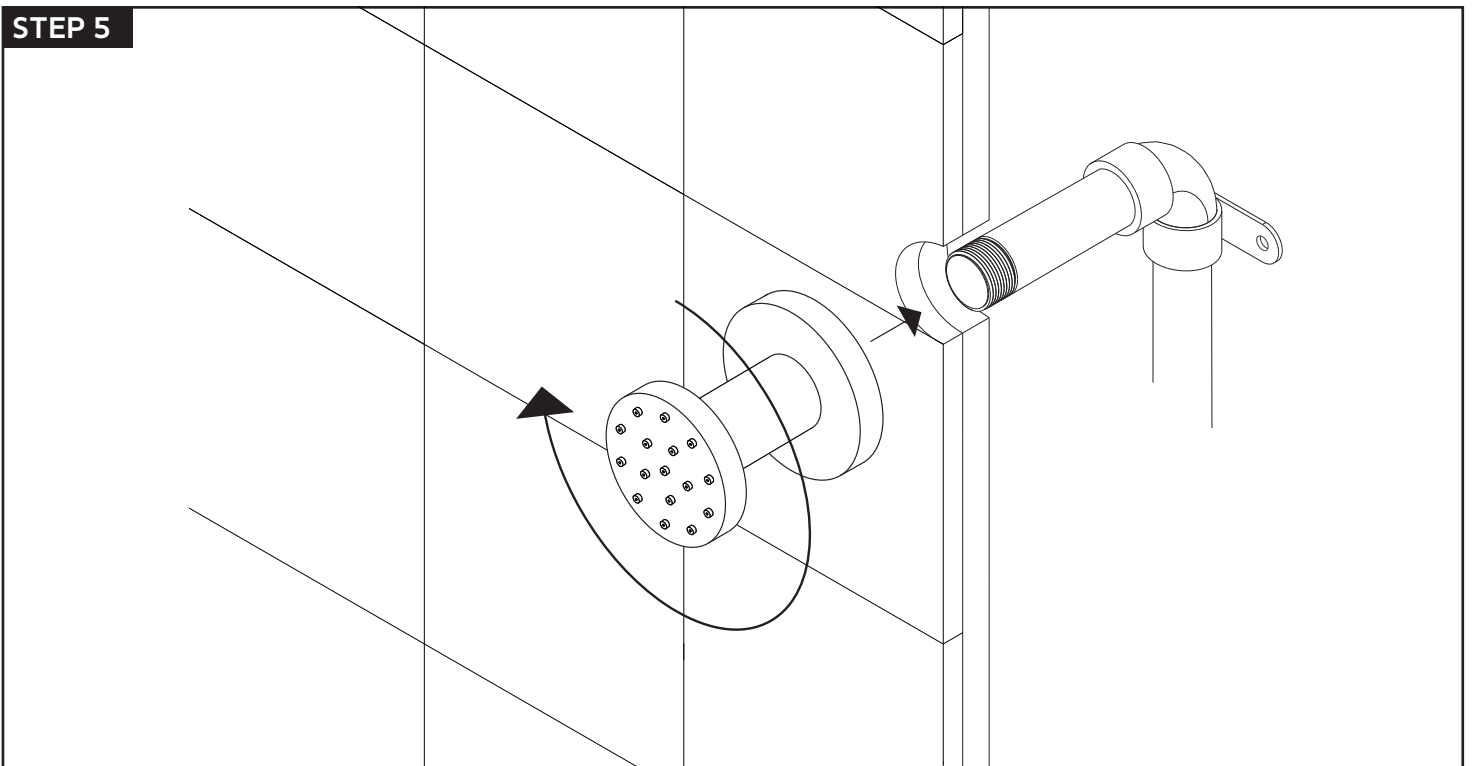

body jet rnd

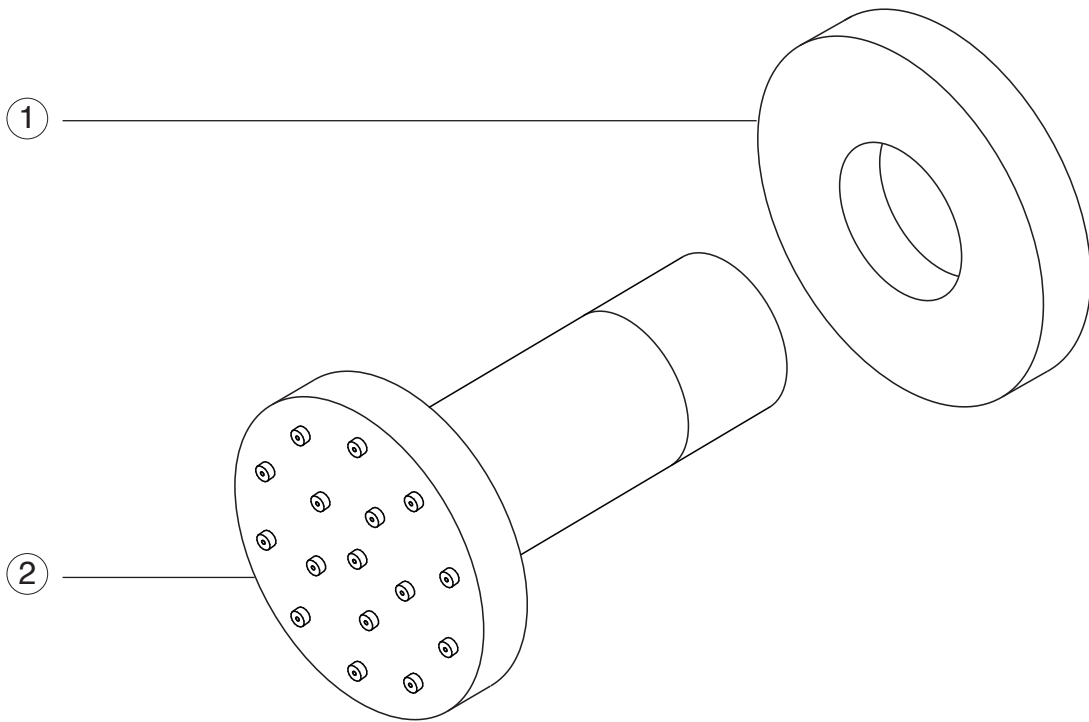

① **ESCUTCHEON** F905-2 XP1

② **BODY JET** F905-2 XP2

For best results, keep the following in mind to retain the high quality finish of your artos® shower outlet:

- Use a soft, dampened sponge or cloth. On no account should you use an abrasive material such as a brush, scouring pad or steel wool to clean surfaces.
- Test your cleaning agent solution on an inconspicuous area before applying to the entire product.
- Wipe surfaces clean and rinse completely with water immediately after applying cleaning agent.
- An ideal cleaning technique is to rinse faucet thoroughly and blot dry any water from the surface after each use.

## LIMITED LIFETIME WARRANTY

UWR/LPLWHG/LIHWLPH:DUUDW

UWRIDXFHWKDHEHHPDXIDFWXUHGXGHUWKHKLKHWTXDOLWDGPDXIDFWXULWDGDUGUWR  
IDXFHWDUHXDUDWHHGIRUOLIHDDLWOHDNDGPDXIDFWXULGHIHFWIRUDORDWKHRULLDO  
FRXPHUSXUFKDHURLW7KLDUUDWDSSOLHWRLWDOODWLRWKLW86DDGDDG0HLFR  
TRUWKPHULFDRPPHUFLLDO,GXWULDORUEXLHXHDUHDUUDWHGIRUDSHULRGRIRHHDIURP  
WKHRULLDOGDWHRISXUFKDH

7KLDUUDWLRWUDIHUDEOHDGDSOLHHFOXLHOWRWKHRULLDORHURUHGXHU ,IDGHIHFWL  
IRXGGXULRUPDOXHURLOODWLWHOFWLRUHSDLUUHSODFHRUPDNHDDSSURSULDWHDGMXWPHW  
DPDFDXHGEDFFLGHWPLXHDEXHLPURSUSHULWDOODWLRRUUDOWHWDWLRLOORLWGWKHUUDW  
7KLDUUDWGRHRWFRHUUHSODFHPHWSDUWKHUHGDPDHLFDXHGGERUPDOHDUDGWHDU  
/DERUFKDUHLWDOODWLRURRWKHULFLGHWDORUFRHTXHWLDOFRWLOORWEHFRHUHG

5HSODFHPHWSDUWWKDWTXDOLIIRUDUUDWUHSDLUFDEHREWDLHGFEFRWDFWLUWRDW  
5726RUEHPDL0DWLIRDURXFRPURRIRISXUFKDHURULLDODOHUHFHLSWIURPWKH  
RULLDOFRXPHUSXUFKDHUPXWDFFRPSDDOODUUDWFODLP:KHXEPLWWLRXUFODLP L  
ULWLSOHDHSURLGHRXUDPHDGGUHDGWHOHOSKRHXPEHU

O H D H U H L W H U W K L S W R O G L X H F D W : : : 5 7 2 6 8 6 2 0

Item No: **F 905-2**  
Serial No: