

# artos<sup>®</sup>

## F402-2

## INSTALLATION GUIDE

deck mount tub filler squ

BRUSHED NICKEL(BN)



CHROME(CH)



BLACK(BK)



# artos<sup>®</sup>

F402-2

## OPERATING SPECIFICATIONS

deck mount tub filler squ



### FEATURES

Deck mount tub filler

### OPERATING PRESSURE

Minimum: 15 psi

Maximum: 75 psi

Above 90psi it may be necessary to install a pressure reducer

### FLOW RATE




12.0 USGPM

# artos<sup>®</sup>

F402-2

## PRODUCT DIMENSIONS

deck mount tub filler squ

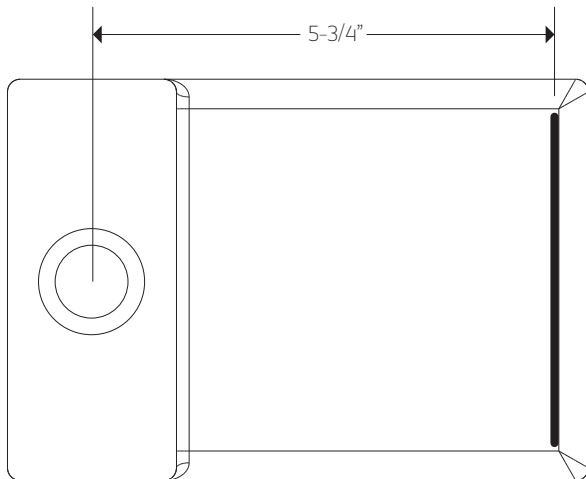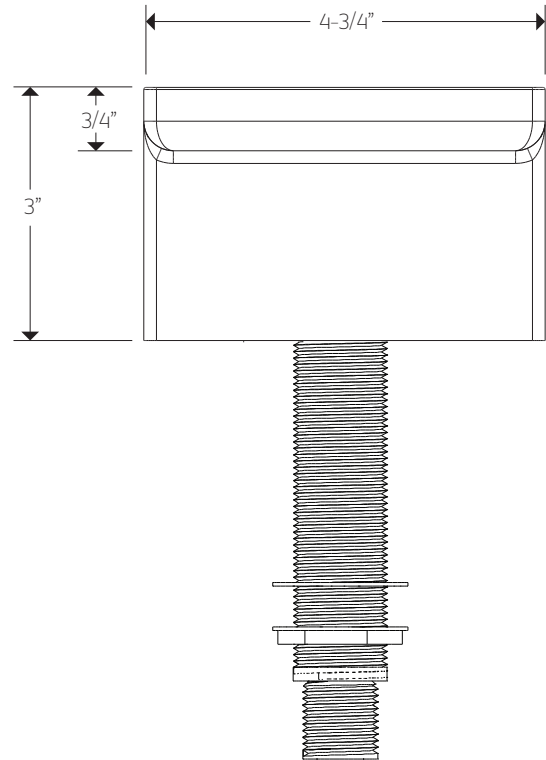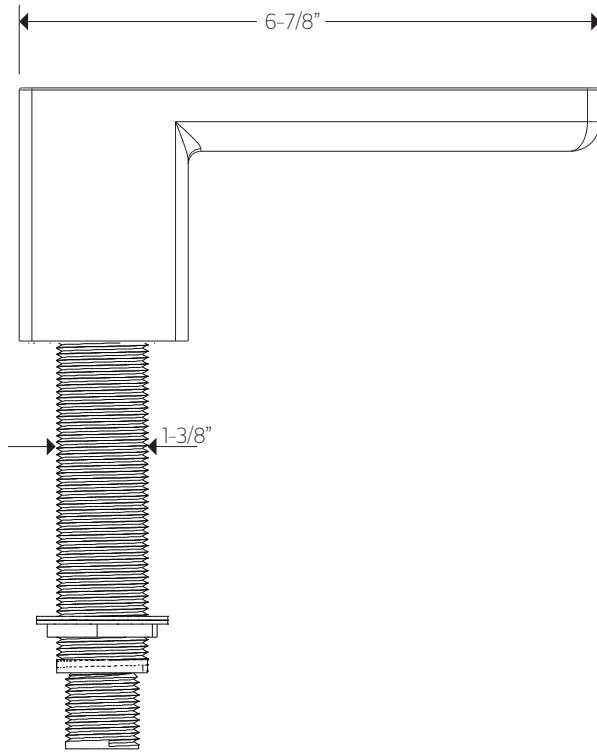


# artos<sup>®</sup>

F402-2

deck mount tub filler squ

## STEP 1




2" MAX  
TUB DECK  
THICKNESS


Ø1-5/8"  
TUB FILLER HOLE  
DIAMETER

# INSTALLATION STEPS

## STEP 2

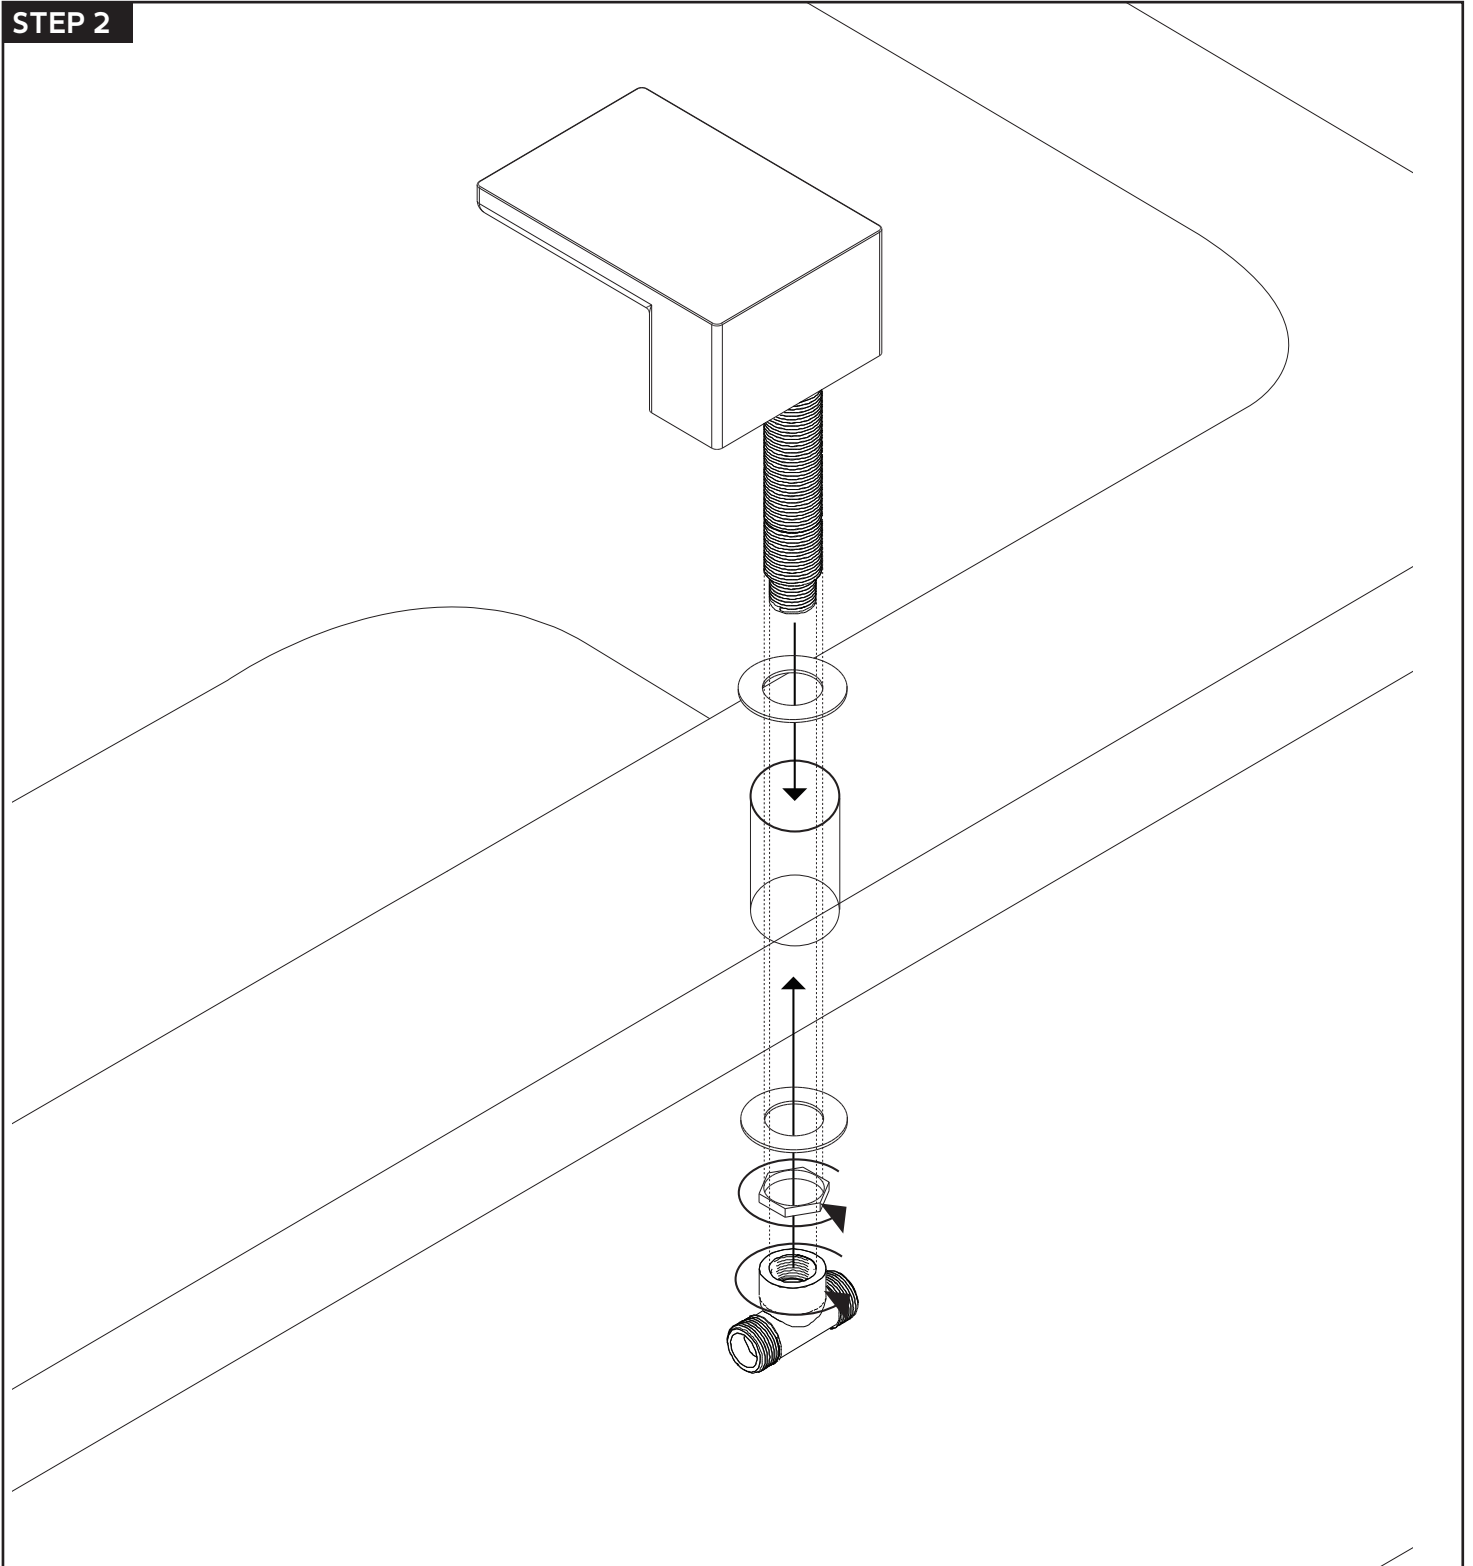

deck mount tub filler squ

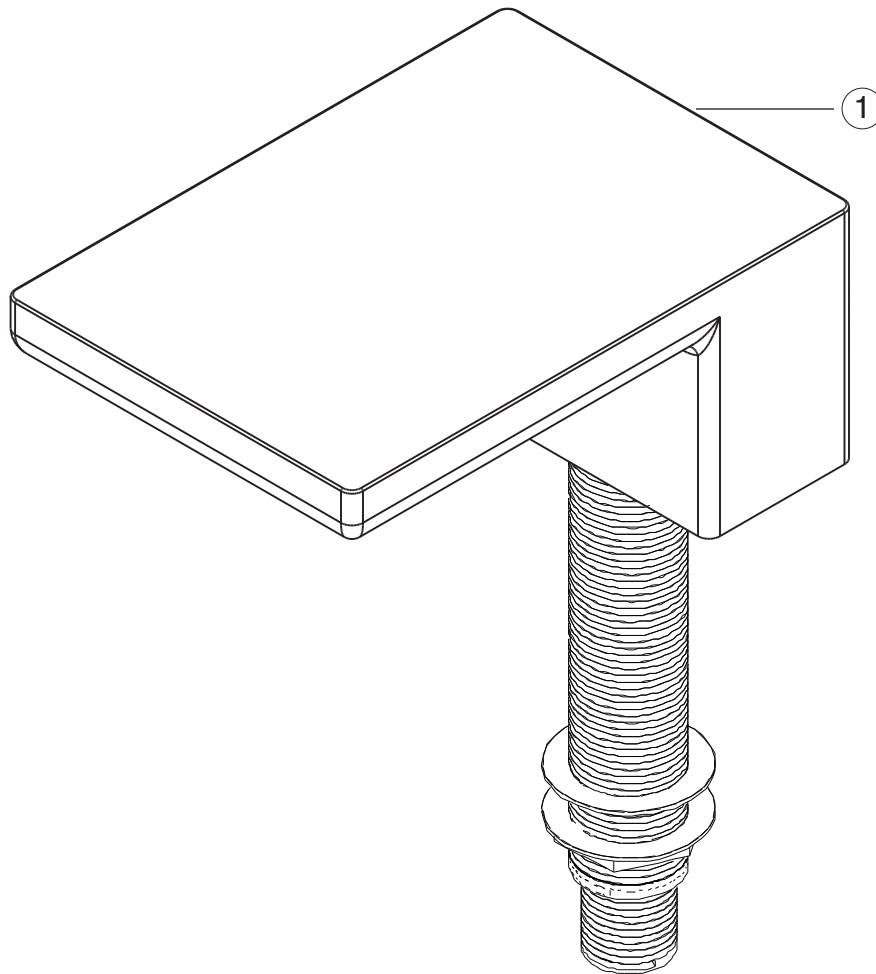

① TUB FILLER BODY F402-2 XP1

# artos<sup>®</sup>

F402-2

deck mount tub filler squ

## CARE & MAINTENANCE

For best results, keep the following in mind to retain the high quality finish of your artos<sup>®</sup> faucets:

- Use a soft, dampened sponge or cloth. On no account should you use an abrasive material such as a brush, scouring pad or steel wool to clean surfaces.
- Test your cleaning agent solution on an inconspicuous area before applying to the entire faucet.
- Wipe surfaces clean and rinse completely with water immediately after applying cleaning agent.
- An ideal cleaning technique is to rinse faucet thoroughly and blot dry any water from the surface after each use.

## LIMITED LIFETIME WARRANTY

**artos<sup>®</sup> faucets are guaranteed for life against leaks and finishing defects for as long as the original purchaser owns it.**

Damage caused by accident, misuse, abuse, improper installation, improper cleaning or alteration will void the warranty. This warranty does not cover replacement parts where damage is caused by normal wear and tear. Westover, Inc is not responsible for labor charges, installation or other incidental or consequential costs. Proof of purchase must be provided with all claims.

Please register this product online at [WWW.ARTOS.US.COM](http://WWW.ARTOS.US.COM)

ITEM NO. **F402-2**  
SERIAL NO.