

artos[®]

FSC1012


INSTALLATION GUIDE

flexible hose shower kit with
integrated water outlet squ

BRUSHED NICKEL(BN)



CHROME(CH)



BLACK(BK)



T:877.927.8679

©2019 ed. All technical and pricing information is subject to change without prior notice. To confirm accuracy check with Artos customer service.

artos[®]

FSC1012

flexible hose shower kit with
integrated water outlet squ

OPERATING SPECIFICATIONS



FEATURES

Integrated Water Outlet
60" Flexible Hose

OPERATING PRESSURE

Minimum: 15 psi
Maximum: 75 psi
Above 90psi it may be necessary to install a
pressure reducer

OPERATING TEMPERATURE

Maximum: 176°

FLOW CAPACITY


2.0 USGPM

INLET/OUTLET

1/2" Female NPT

REQUIREMENTS

This unit requires a control




artos[®]

FSC1012

HANDHELD DIMENSIONS


flexible hose shower kit with
integrated water outlet squ

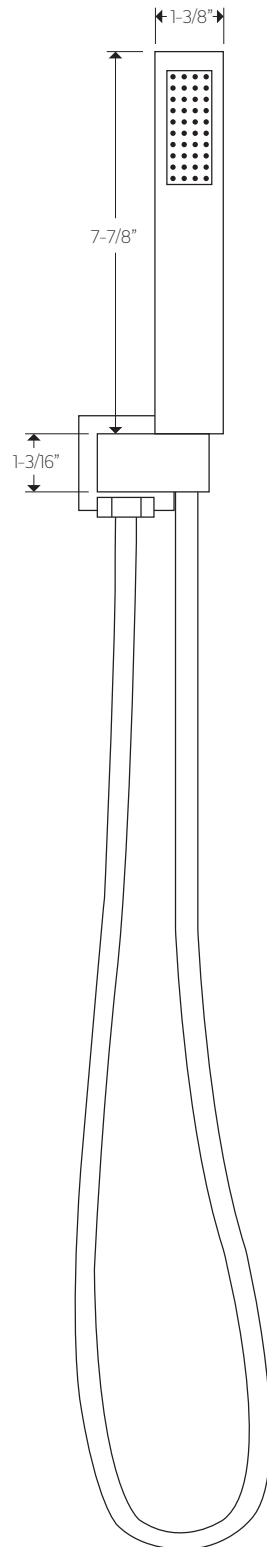

flexible hose shower kit with
integrated water outlet squ


STEP 1

1-5/8" DIAMETER THROUGH
FINISHED WALL

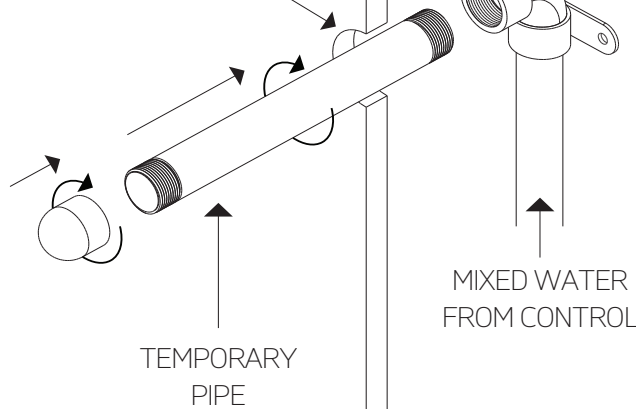


STEP 2

1-5/8" DIAMETER
THROUGH FINISHED
WALL

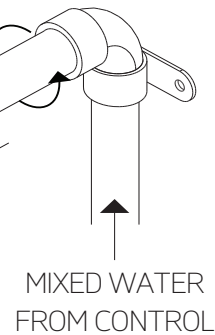


HANDHELD INSTALLATION STEPS

STEP 3

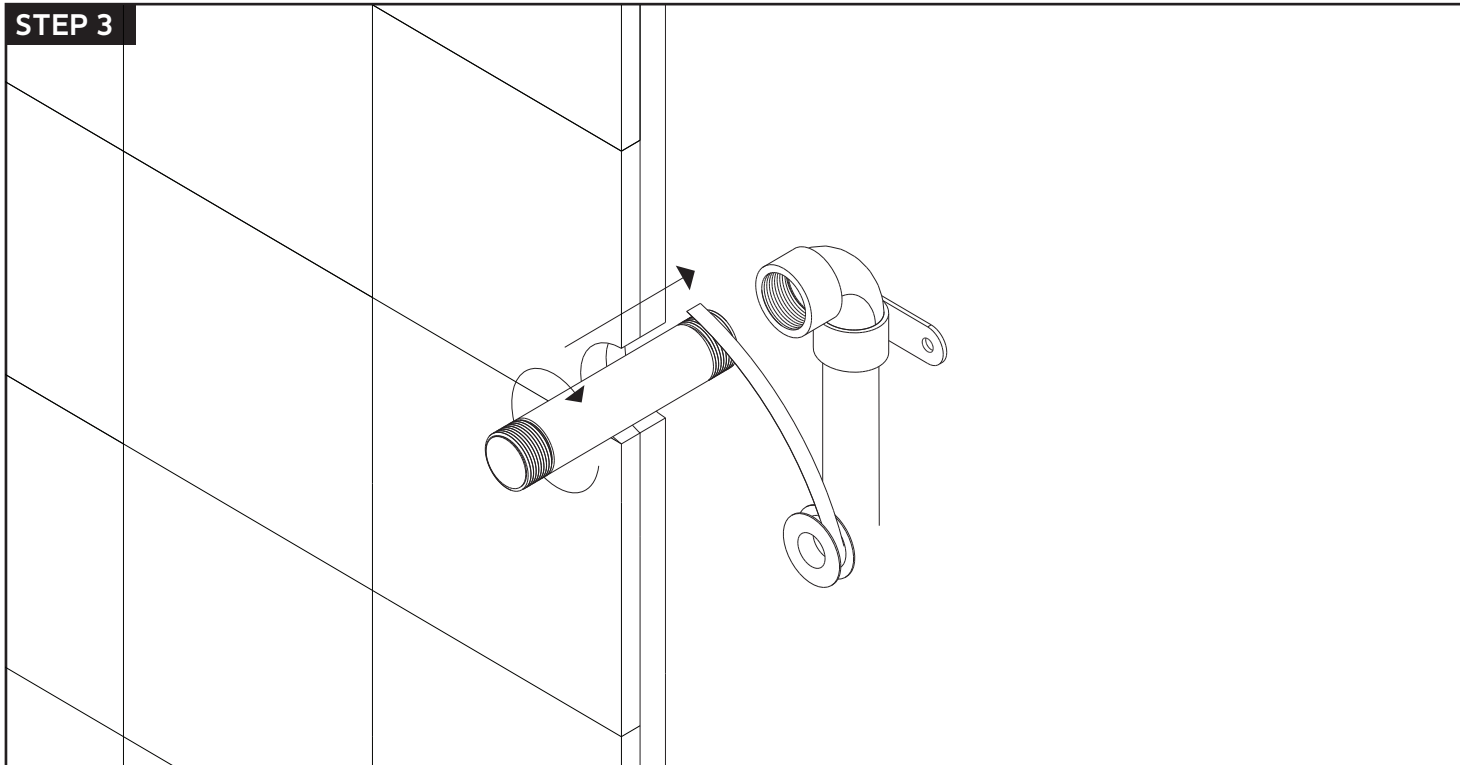

STEP 4

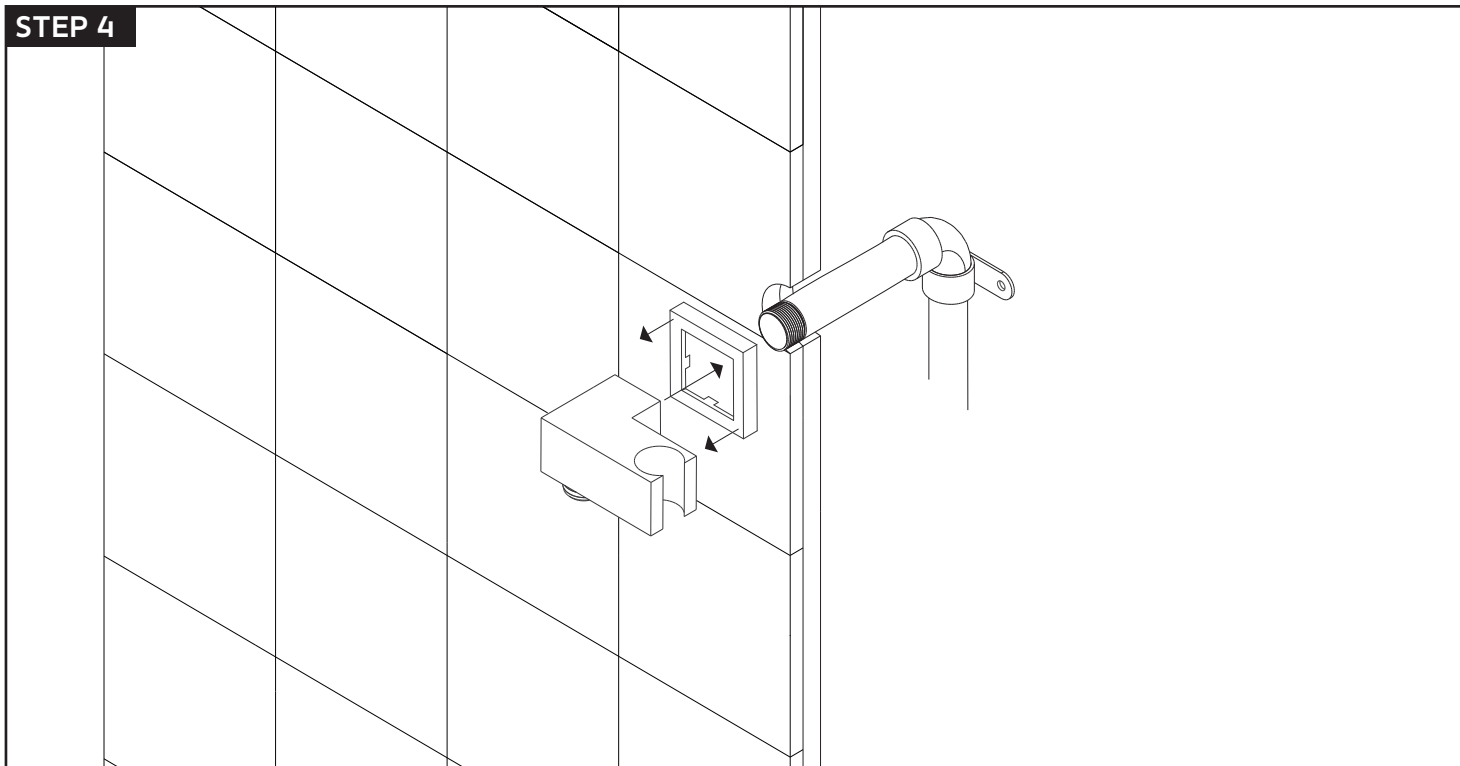


artos[®]

FSC1012


HANDHELD INSTALLATION STEPS

flexible hose shower kit with
integrated water outlet squ


STEP 5

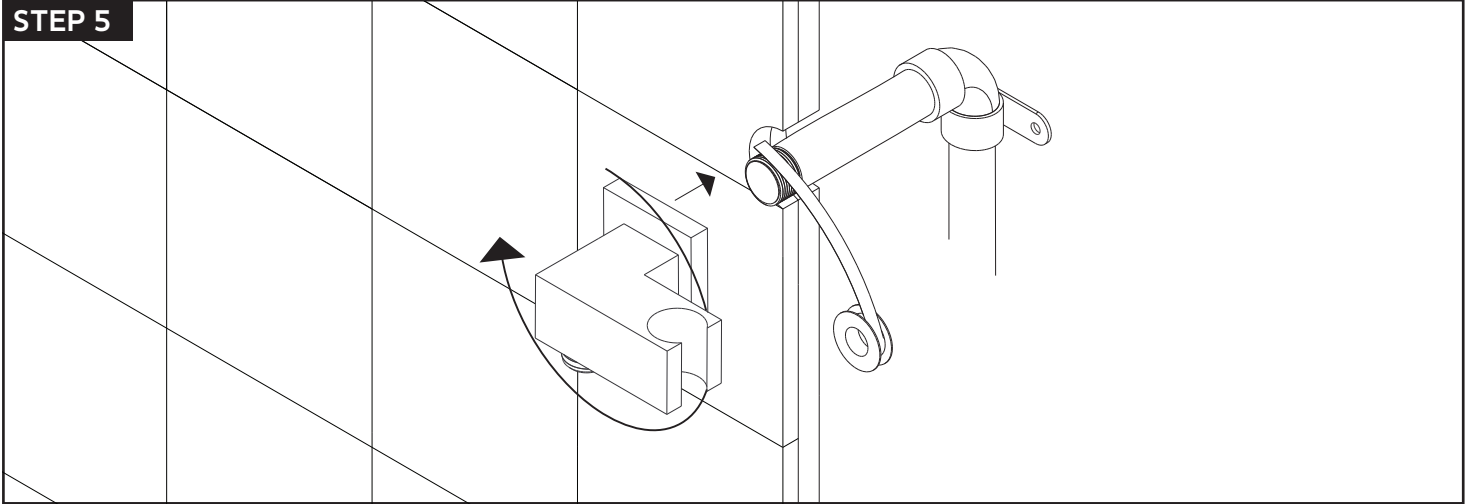

STEP 6

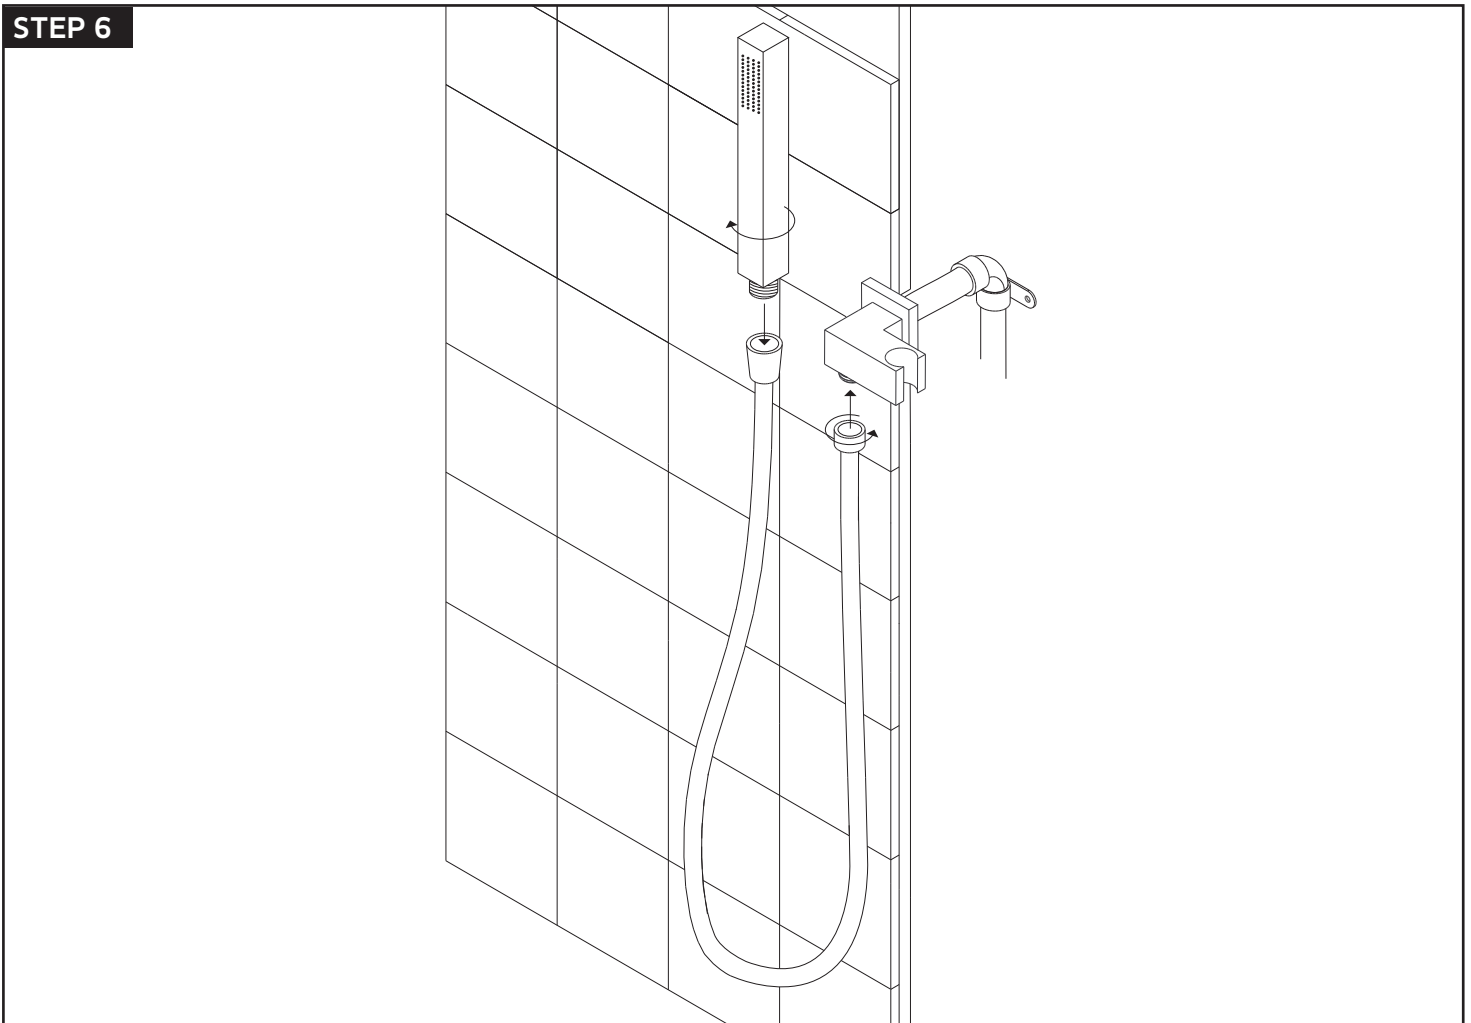

flexible hose shower kit with
integrated water outlet squ

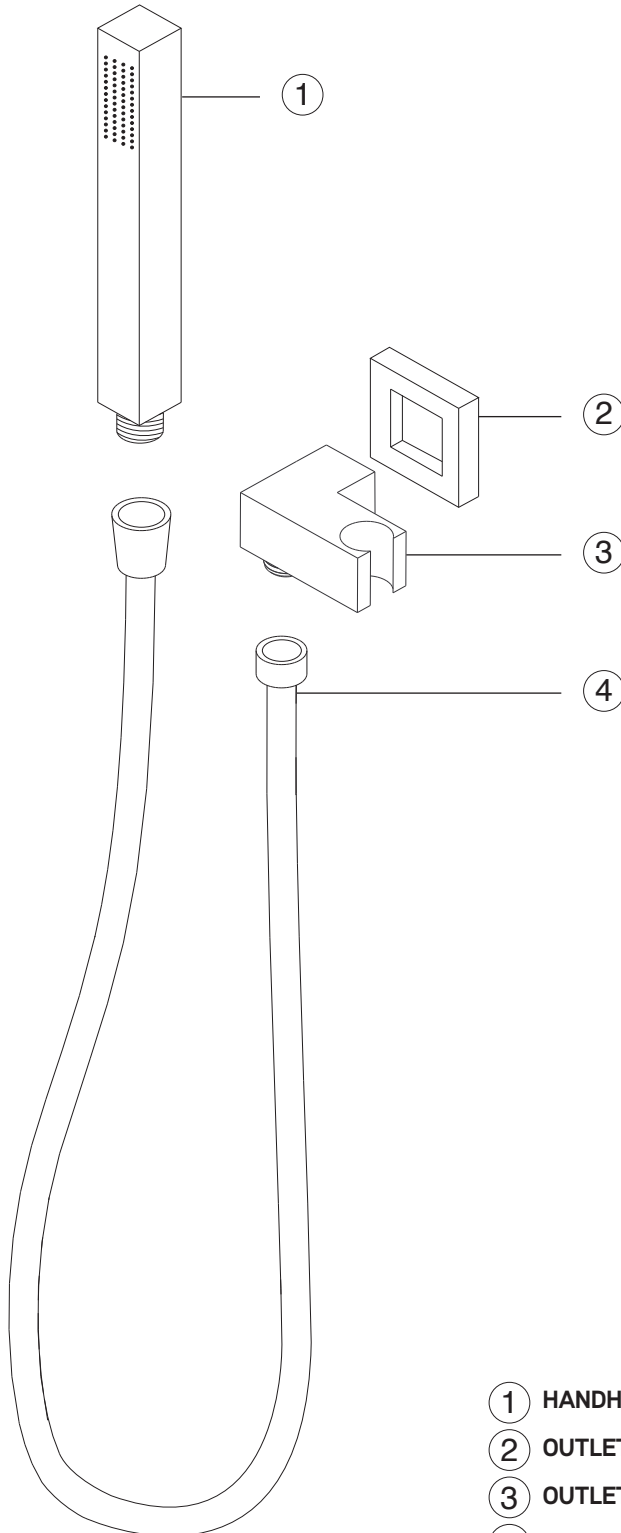

- ① **HANDHELD SHOWER** FS031-HANDHELD XP1
- ② **OUTLET ELBOW/HOLDER ESCUTCHEON** FS031-HANDHELD XP2
- ③ **OUTLET ELBOW/HOLDER** FS031-HANDHELD XP3
- ④ **HOSE** FS031-HANDHELD XP4

artos[®]

FSC1012

CARE & MAINTENANCE

flexible hose shower kit with
integrated water outlet squ

For best results, keep the following in mind to retain the high quality finish of your artos[®] faucets:

- Use a soft, dampened sponge or cloth. On no account should you use an abrasive material such as a brush, scouring pad or steel wool to clean surfaces.
- Test your cleaning agent solution on an inconspicuous area before applying to the entire faucet.
- Wipe surfaces clean and rinse completely with water immediately after applying cleaning agent.
- An ideal cleaning technique is to rinse faucet thoroughly and blot dry any water from the surface after each use.

LIMITED LIFETIME WARRANTY

artos[®] faucets are guaranteed for life against leaks and finishing defects for as long as the original purchaser owns it.

Damage caused by accident, misuse, abuse, improper installation, improper cleaning or alteration will void the warranty. This warranty does not cover replacement parts where damage is caused by normal wear and tear. Westover, Inc is not responsible for labor charges, installation or other incidental or consequential costs. Proof of purchase must be provided with all claims.

Please register this product online at WWW.ARTOS.US.COM

ITEM NO. **FSC1012**
SERIAL NO.