


artos[®]
www.artos-westover.com

Installation Guide

4 Hole Deck Mount Tub Filler F702-2

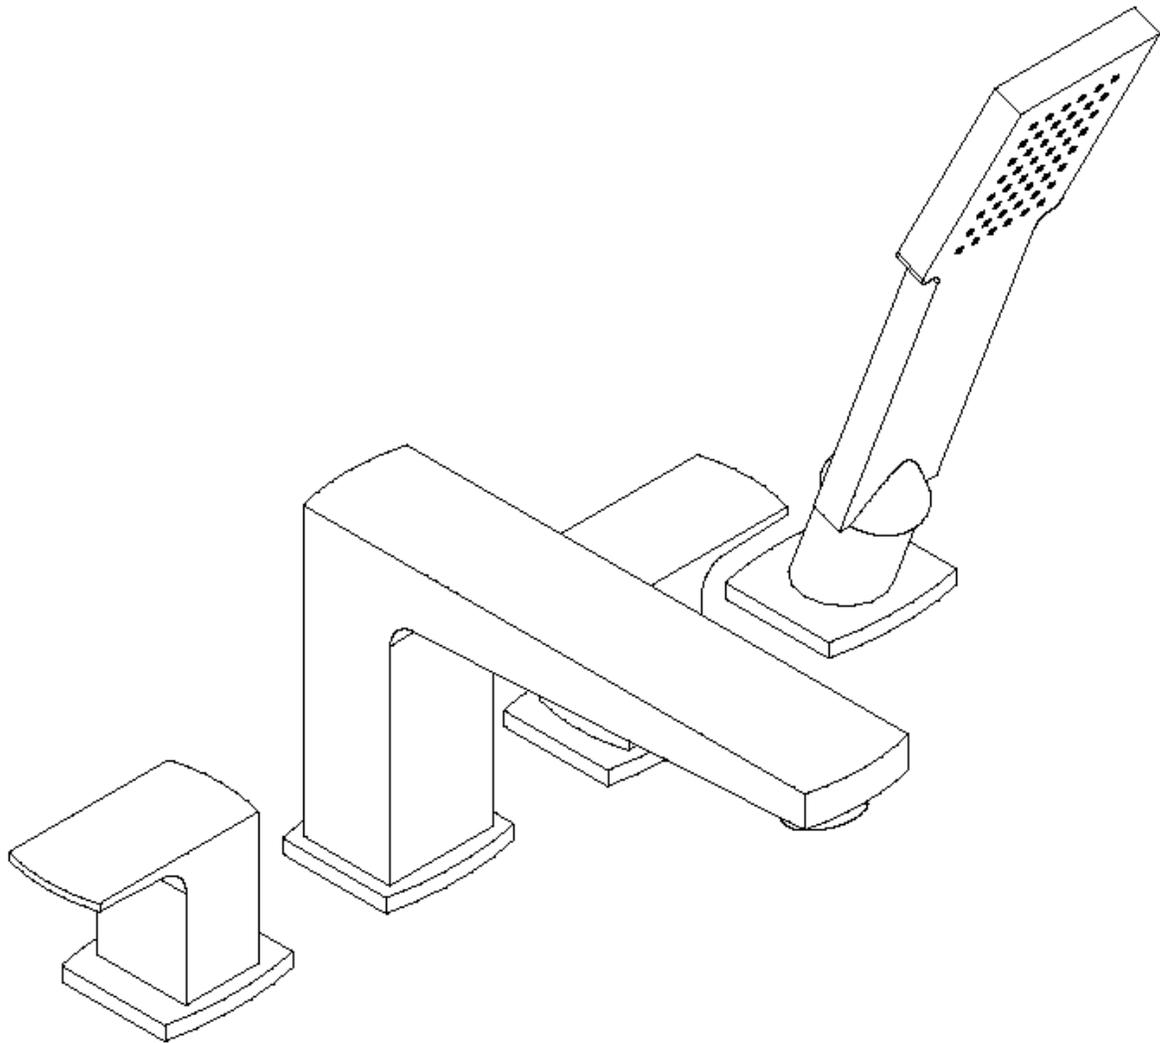


70220411

This publication is for illustrative purposes only and we reserve the right to change details at anytime as deemed necessary.

(fig A)

DIMENSIONS

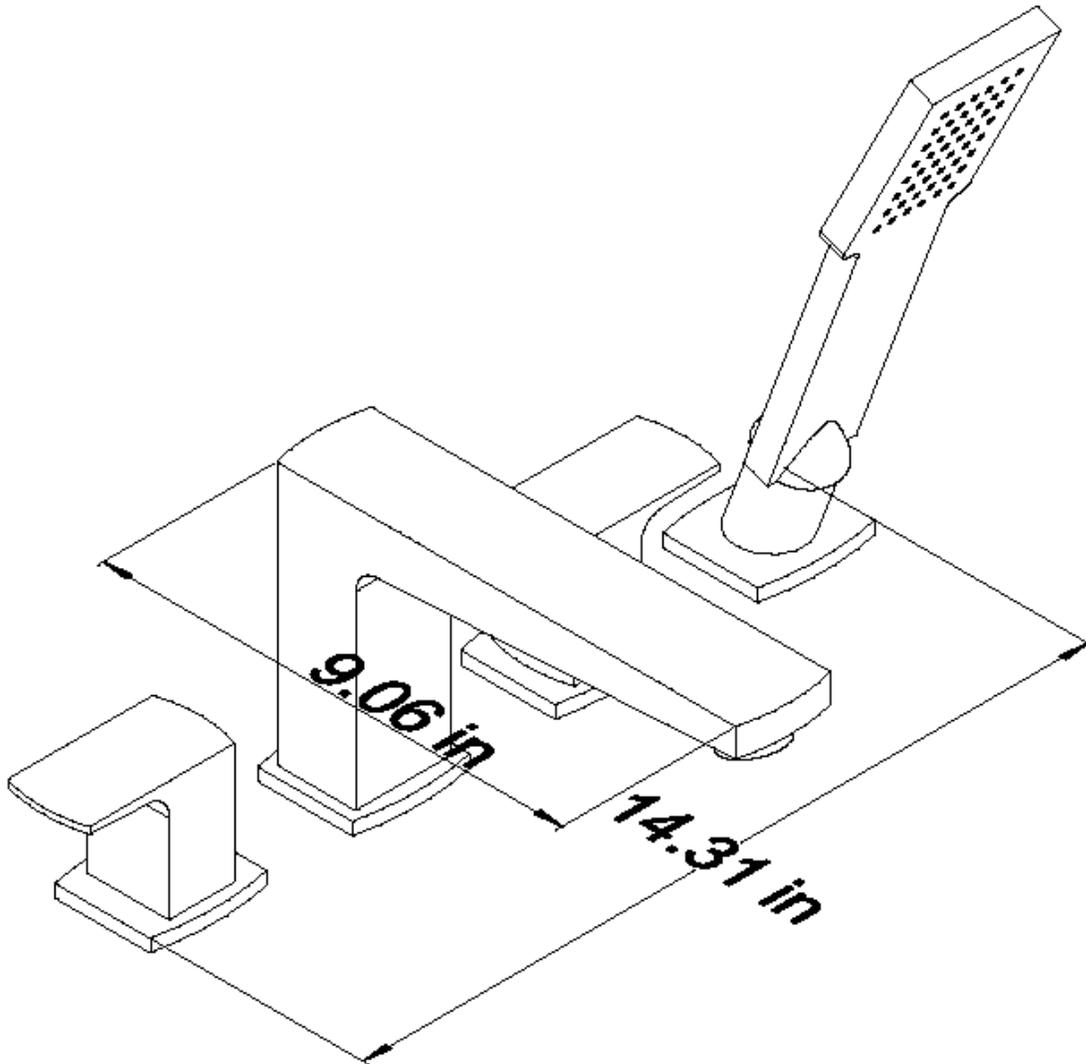


SPECIFICATIONS

Recommended flow pressure between 15 and 75 psi. Above 90 psi it may be necessary to install a pressure reducer. Maximum operating temperature 176°F

70220411


(fig B)

LAYOUT DIAGRAM

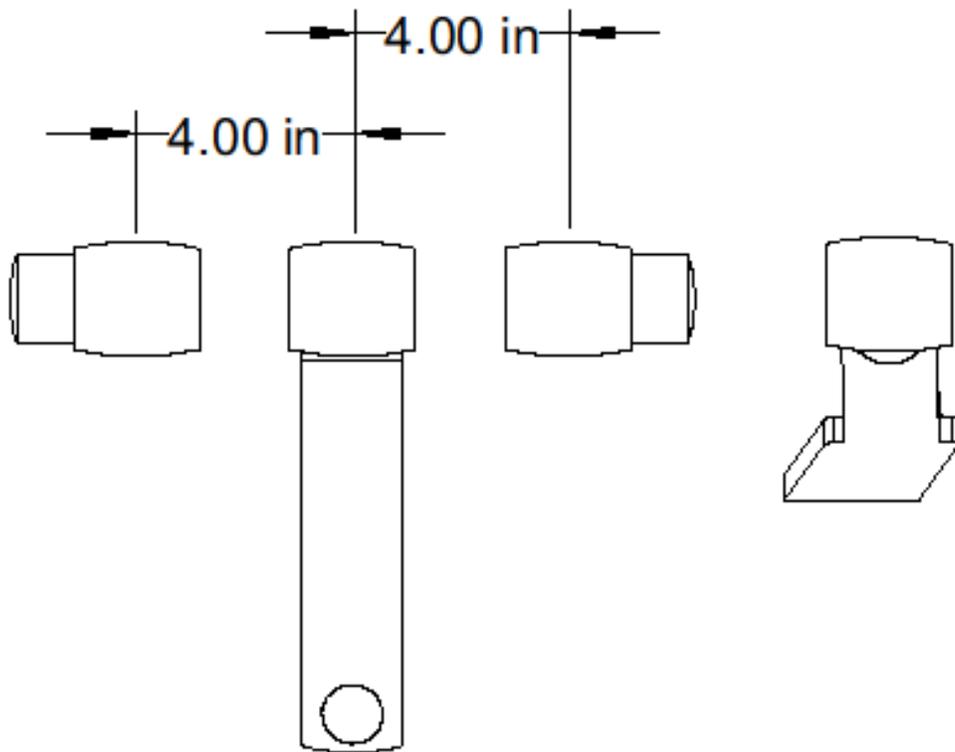

(fig C)

COMPONENTS DIAGRAM

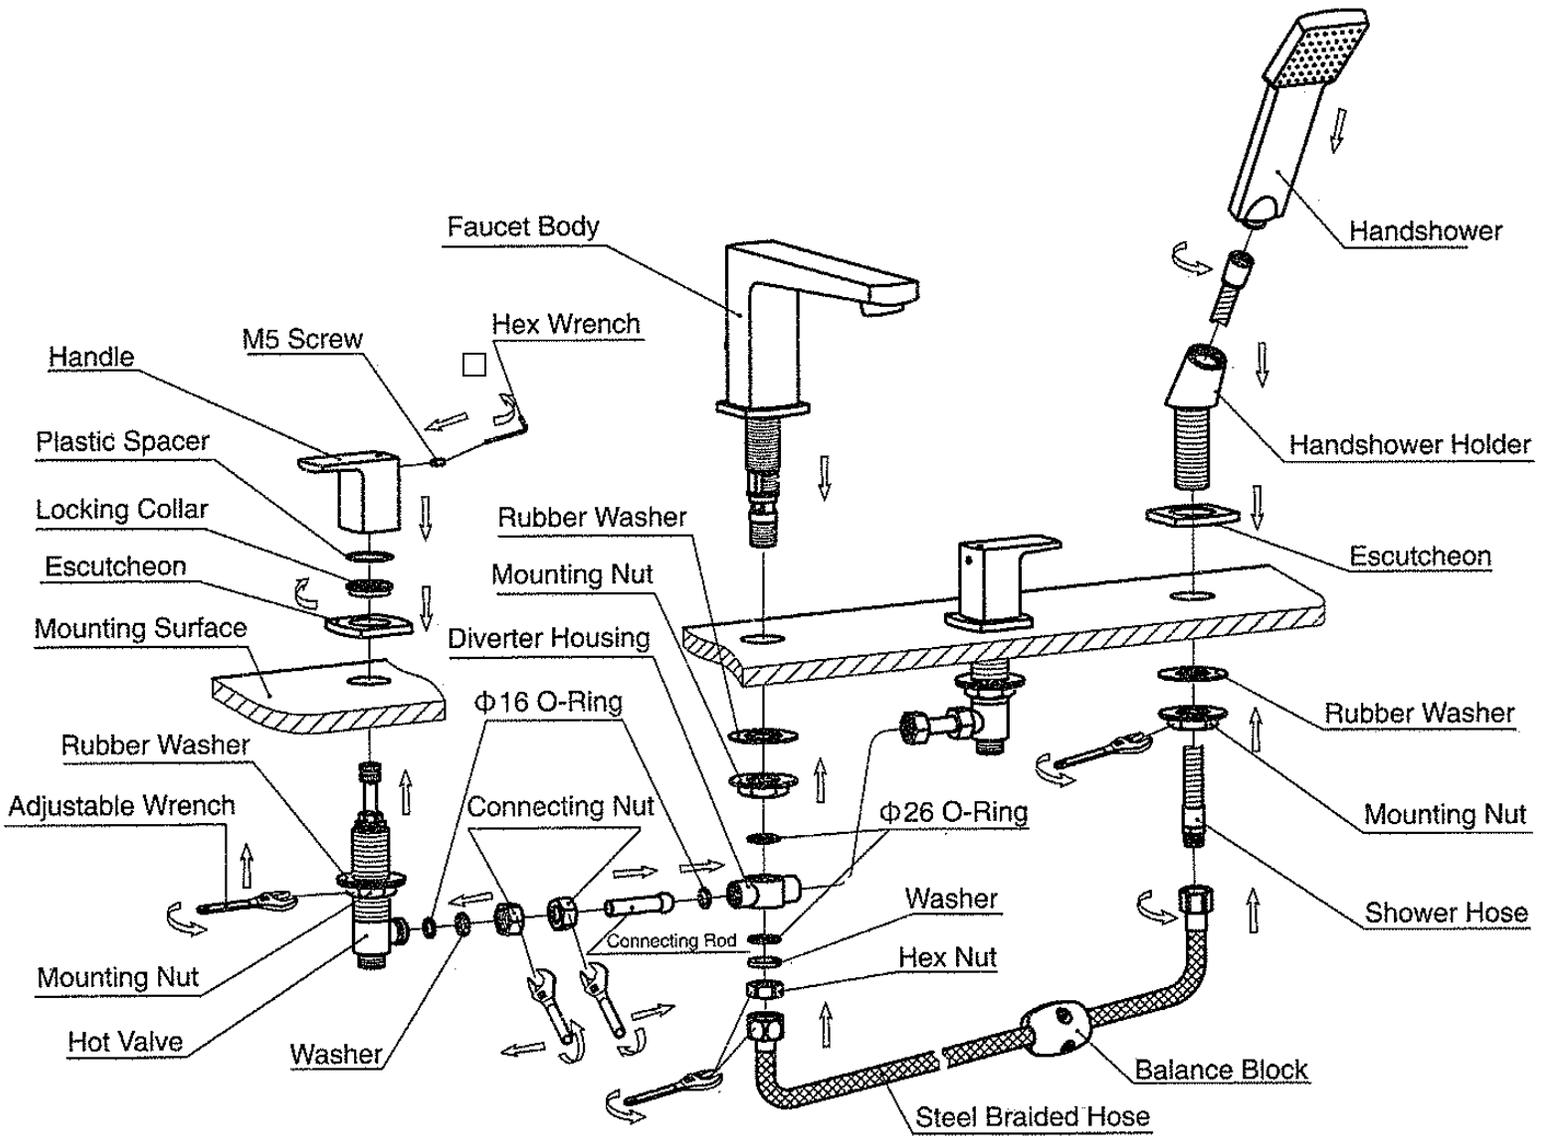

INSTALLATION STEPS

1. Carefully plan layout of components and make holes in deck (fig B)
2. Remove the locking nut and rubber washer from the hand shower holder. Slide the hand shower holder down through the escutcheon and hole then secure with the rubber washer and mounting nut (fig C)
3. Remove the handles, plastic spacers and locking collars of the hot and cold valves keeping the mounting nuts at the bottom position. Slide the hot and cold valves up through the holes (red for left hole, blue for right hole) with the 2 outlets facing each other. Fit escutcheons, tighten the locking collars and mounting nuts in turn and reassemble the handles
4. Remove the hex nut, washer, O ring, diverter housing, mounting nut and the rubber washer from the tub filler, slide the body down through the hole and secure with rubber washer and mounting nut. Reassemble the other parts.
5. Connect the hot and cold valves to the tub filler with connecting rods, tighten the connecting nuts
6. Assemble hand shower hose and balancing block
7. Turn on water supply and check for water tightness and correct operation

***Please note, this product must be used as a 4 hole tub filler. For the 3 hole version without a hand shower please order F702-5**

CARE & MAINTENANCE

For best results, keep the following in mind to retain the high quality finish of your faucet:

- Use a soft, dampened sponge or cloth. On no account should you use an abrasive material such as a brush, scouring pad or steel wool to clean surfaces.
- Test your cleaning agent solution on an inconspicuous area before applying to the entire faucet.
- Wipe surfaces clean and rinse completely with water immediately after applying cleaning agent.
- An ideal cleaning technique is to rinse faucet thoroughly and blot dry any water from the surface after each use.

LIMITED LIFETIME WARRANTY

artos[®] faucets are guaranteed for life against leaks and finishing defects for as long as the original purchaser owns it.

Damage caused by accident, misuse, abuse, improper installation, improper cleaning or alteration will void the warranty. This warranty does not cover replacement parts where damage is caused by normal wear and tear. Westover, Inc is not responsible for labor charges, installation or other incidental or consequential costs. Proof of purchase must be provided with all claims.

PLEASE REGISTER THIS PRODUCT ONLINE AT WWW.ARTOS-WESTOVER.COM

Item No
Serial No

70220411